
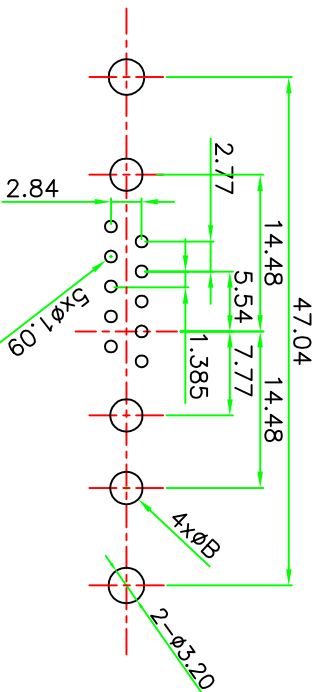
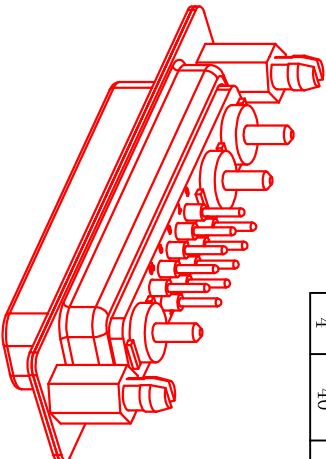



“*” Pivot Dimension

ROHS Component

PO(X)	电流强度(A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

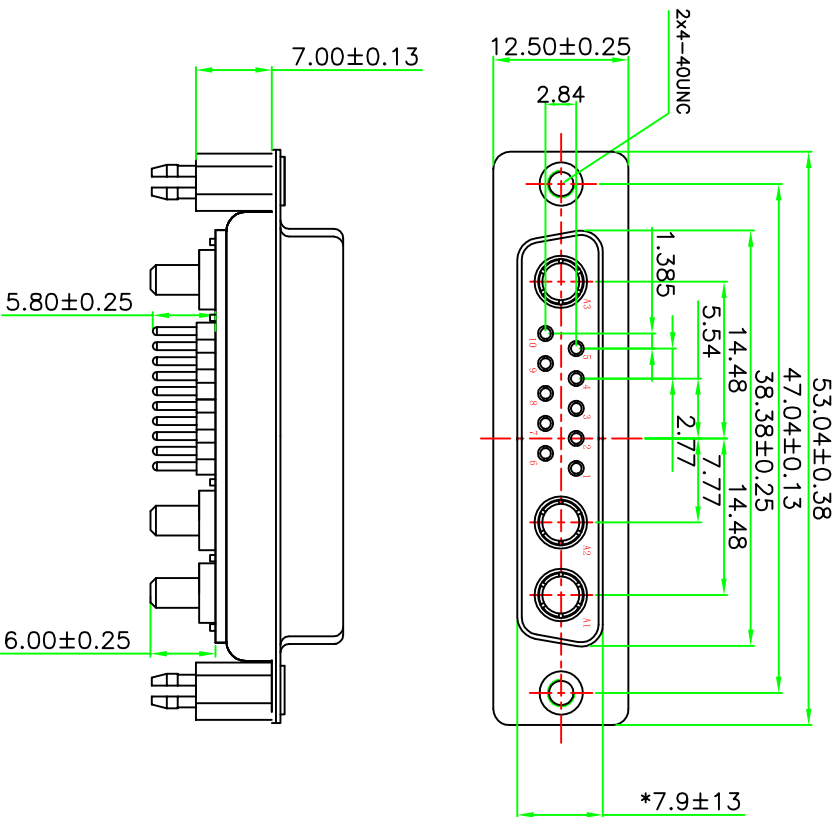

PCB LAYOUT

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
FORK:COPPER ALLOY , Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

		东莞市迅颢原精密连接器有限公司	
Dongguan Signalorigin Precision Connector Co.,Ltd			
TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X* ±5° X* ±2°	DRAWN BY : 杨剑玉	DATE : 2010. 05. 15	PART NAME: 13W3 母 电流直焊板式柳7.0鱼叉
CHECKED BY: 侯应文	DATE : 2010. 05. 15	PART NO. MOLD NO.	XYH-05-2216
APPROVED BY: 胡超	DATE : 2010. 05. 15	REMARK	
SCALE: 1:1	SIZE: A4	DRAW NO.	