
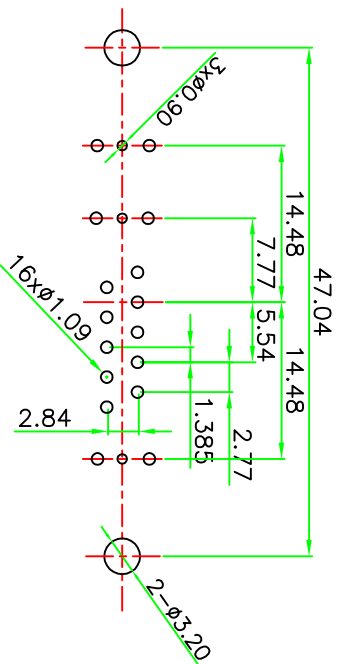
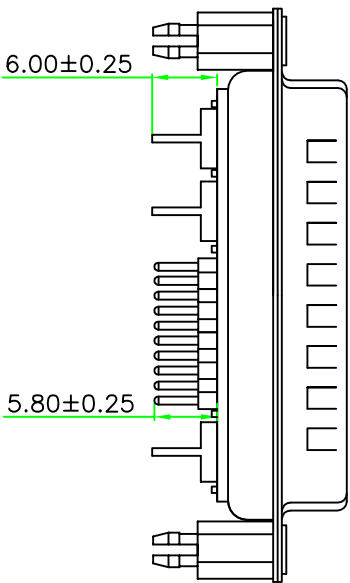
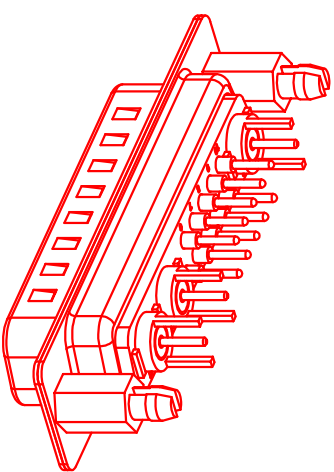



“*” Pivot Dimension

RoHS Component

PO(X)		CURRENT RATING (A)
5		50
7		75

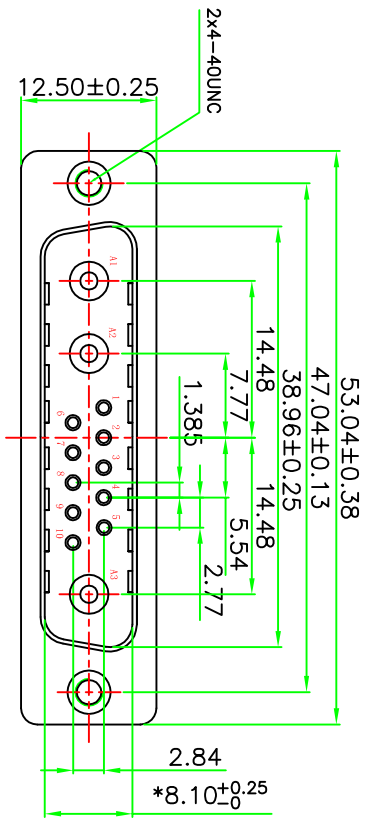

PCB LAYOUT

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH FREQUENCY CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
FORK: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
THE RADIO FREQUENCY RANGE: 0~3GHz.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING : 3.0 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~+125° .



东莞市迅源精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉		2010. 05. 15		13W3 公 射频直焊板式柳7.0鱼叉	
XX	±0.25	CHECKED BY:		DATE :		PART NO.	
XXX	±0.13	侯应文		2010. 05. 15		XHY-05-2219	
X* ±5°	X* ±2°	APPROVED BY:		DATE :		MOLD NO.	
UNIT: mm [inch]		胡 超		2010. 05. 15		FS13W3MXH0800000000000	
SCALE: 1:1		REMARK		DRAW NO.			
SIZE: A4							