
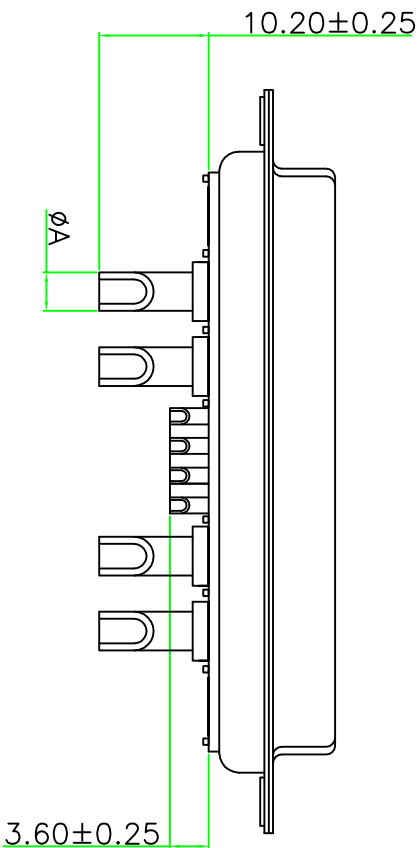



“*” Pivot Dimension

Rohs Component

P0(X)	A	B	WIRE	CURRENT RATING(A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

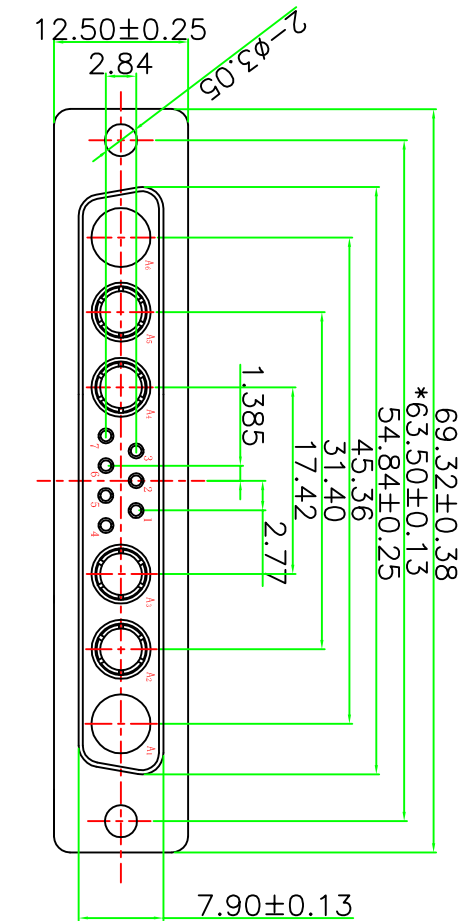

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:2. 7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

		东莞市迅颢原精密连接器有限公司 Dongguan Signaorigin Precision Connector Co.,Ltd	
TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° X'° ±1°		DRAWED BY : 杨冬梅	DATE : 2009. 09. 11
CHECKED BY: 余飞仙		DATE : 2009. 09. 12	DRAW NO. XHY-05-2402
APPROVED BY: 胡 越		DATE : 2010. 01. 30	REMARK MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			