
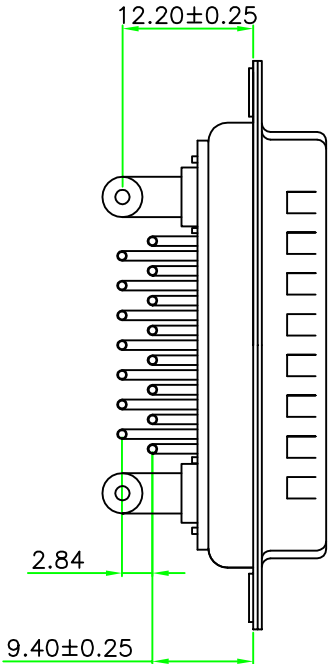
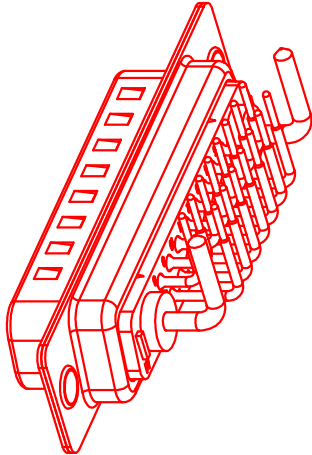



“*” Pivot Dimension

RoHS Component

PO(X)	电流强度(A)	∅A	PCB ∅B
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

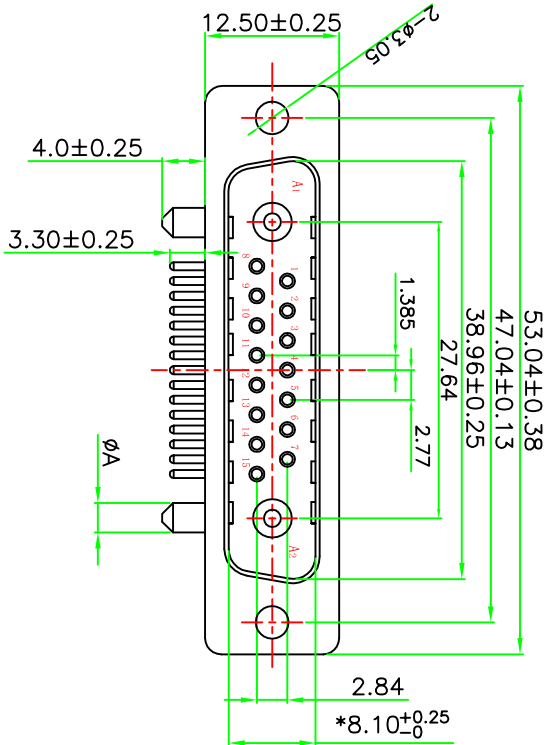

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市讯颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X.	±0.38	杨冬梅		2009. 09. 11		17W2 公	电流弯焊板式传统铆合
XX	±0.25						
XXX	±0.13						
X° ±3°	X.X° ±1°						
UNIT: mm [inch]		CHECKED BY: 余飞仙		DATE : 2009. 09. 12		DRAW NO. XHY-05-2605	
SCALE:1:1		APPROVED BY: 胡期 赵超		DATE : 2010. 01. 30		PART NO. PR17W2MXH0000000000000	
SIZE: A4						REMARK	
						MOLD NO.	