
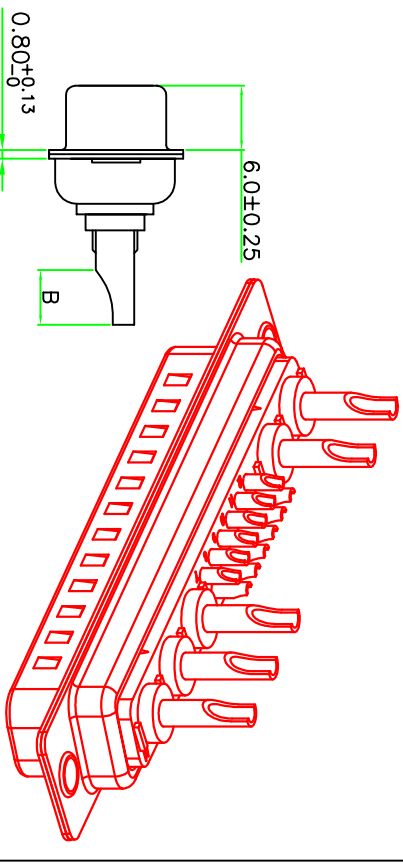


“*” Pivot Dimension

RoHS Component

P0(X)	A	B	WIRE	CURRENT RATING(A)
1	2.5	4.5	14#~16#	10
2	3.6	5.0	10#~12#	20
3	4.4	5.5	8#~10#	30
4	5.5	5.5	6#~8#	40

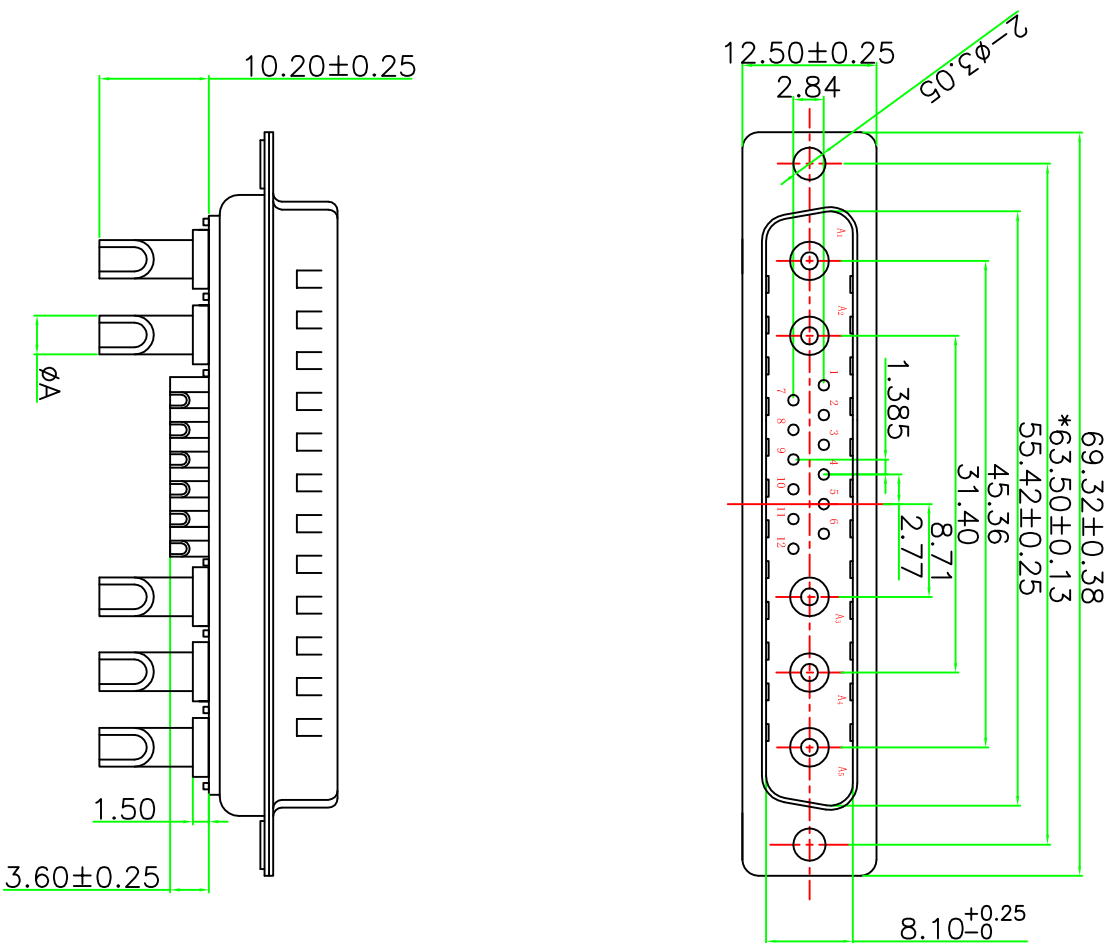

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

		东莞市讯颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd	
TOLEARNCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° X'° ±1°		PART NAME: 17W5 公 电流焊线式传统铆合	
DRAWED BY : 杨冬梅		DATE : 2009. 09. 11	
CHECKED BY: 余飞仙		DATE : 2009. 09. 12	
APPROVED BY: 胡 超		DATE : 2010. 01. 30	
SCALE:1:1		SIZE: A4	
UNIT: mm [inch]		REMARK	
SIZE: A4		MOLD NO.	