
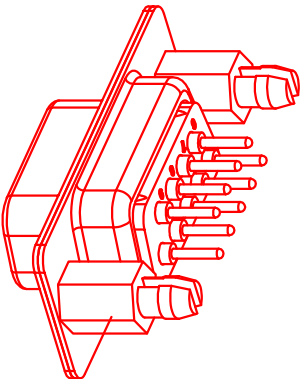



“*” Pivot Dimension

RoHS Component

P0(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
009	16.33	24.99	30.81	19.28
015	24.66	33.32	39.14	27.51
025	38.38	47.04	53.04	41.28
037	54.94	63.50	69.32	57.71

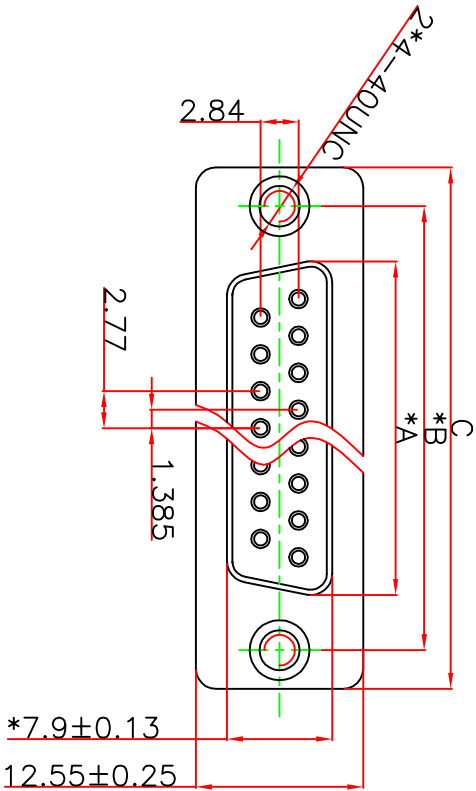



NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V
CONTACT CURRENT RATING: 5AMP
CONTACT RESISTANCE: 15mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC
DIELECTRIC STRENGTH: 500V AC RMS for 1minute
OPERATION TEMPERATURE: -55℃ ~125℃

2. MATERIAL:

INSULATOR: PBT+30% G.F (UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATED: GOLD FLASH OVER NICKEL
SHELL: SPCC
SHELL PLATED: NICKEL/TIN
FORK: COPPER ALLOY/PLATED NICKEL

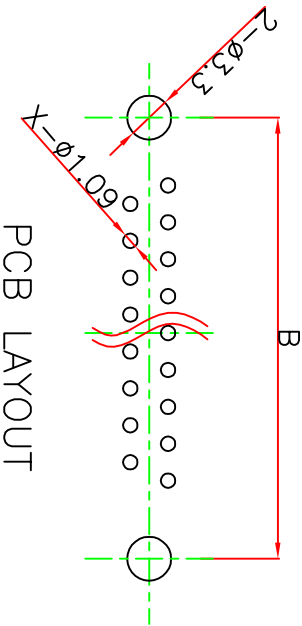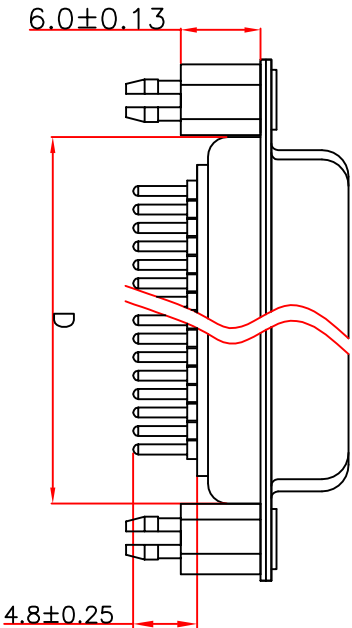

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X XX ±0.40 XXX ±0.20 XXX ±0.10 X' ±5° XX' ±2°	DRAWN BY :	DATE :	PART NAME:	
	杨剑玉	2010.05.15	DP XP 母 直焊板式侧6.0鱼叉	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	XHV-06-0010
	侯应文	2010.05.15	MOLD NO.	PDPYXXFH050000900000000
APPROVED BY:	DATE :	REMARK		
	胡超	2010.05.15	DRAW NO.	