
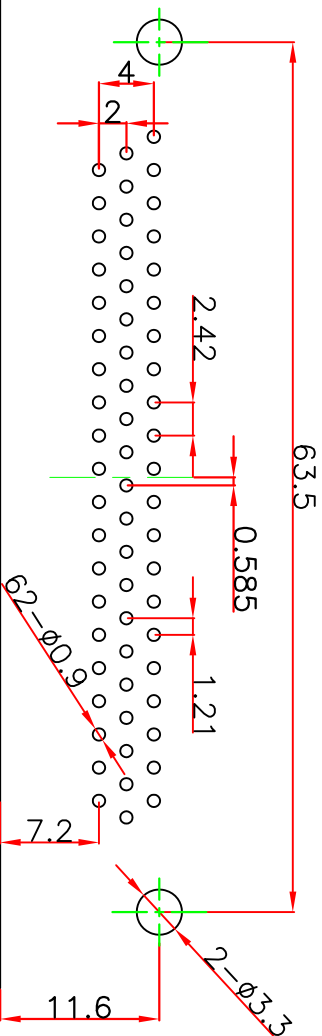
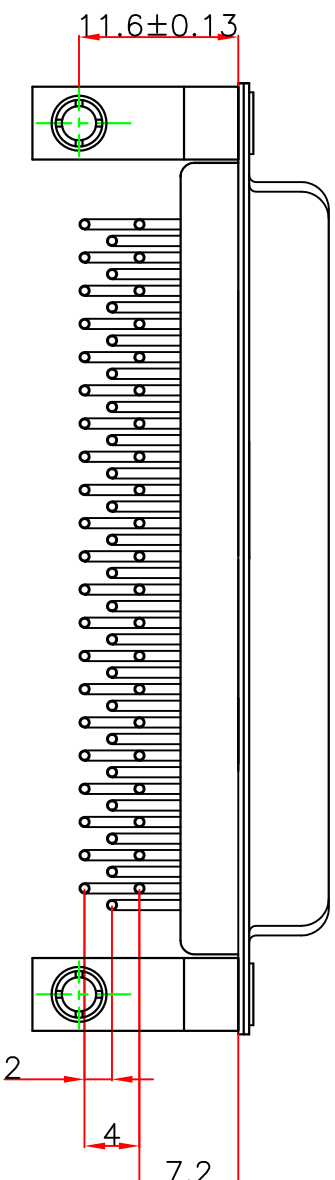
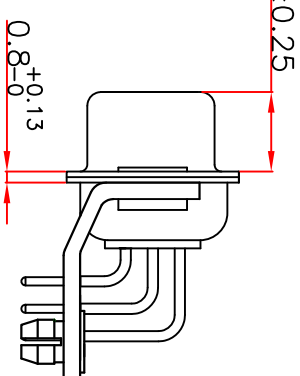


“*” Pivot Dimension

RoHS Component

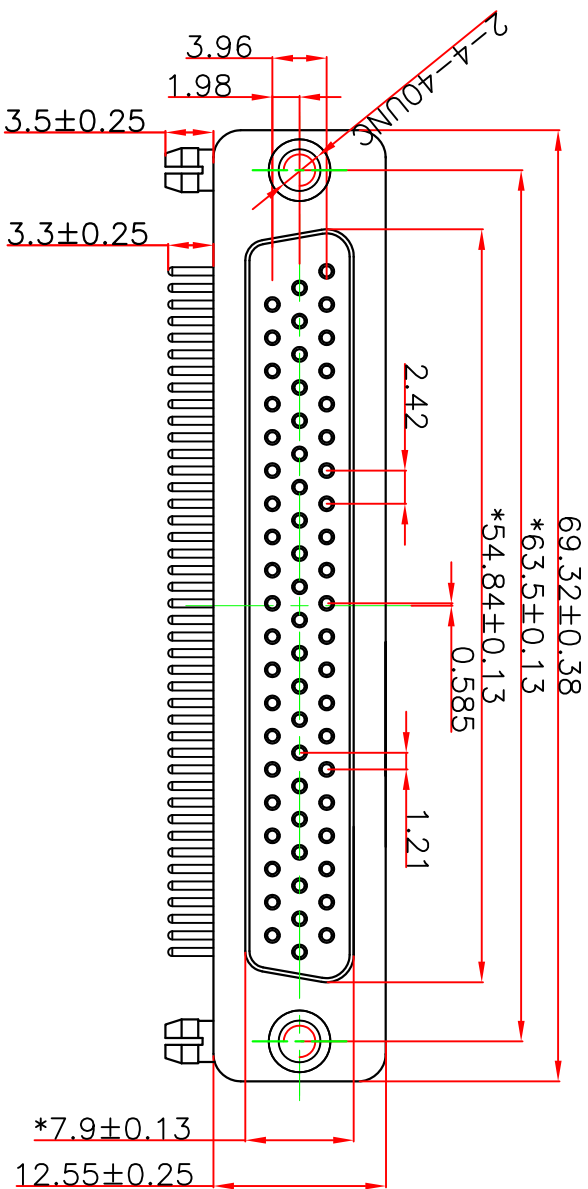

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V
CONTACT CURRENT RATING: 3AMP
CONTACT RESISTANCE: 15mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC
DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE
OPERATION TEMPERATURE: -55℃ ~125℃

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATED: GOLD FLASH OVER NICKEL
SHELL: SPPC
SHELL PLATED: NICKEL/TIN
BRACKET: COPPER ALLOY PLATED Ni

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: XX ±0.38 XXX ±0.25 XXXX ±0.13 X' ±5° X" ±1°		DRAWN BY: 杨冬梅		DATE: 2009.12.16		PART NAME: HDR 62 母 弯焊板式脚11.6支架 H=7.2	
UNIT: mm [inch]		CHECKED BY: 杨剑玉		DATE: 2014.11.05		DRAW NO: XHY-06-0204	
SCALE:1:1		APPROVED BY: 胡超		DATE: 2014.11.05		REMARK	
						MOLD NO.	