
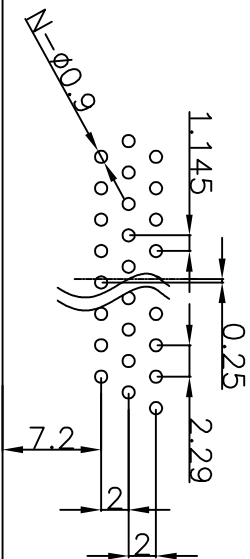
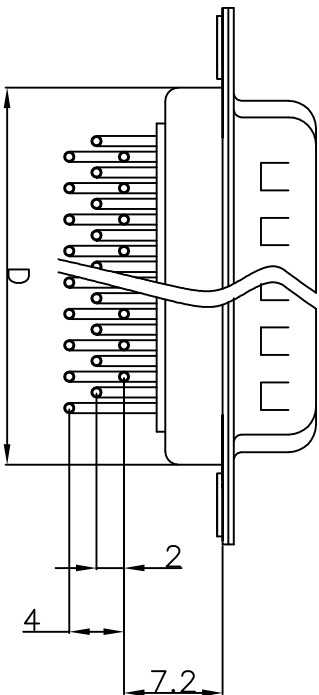



所用物料均符合ROHS标准

标“*”为重点检验尺寸

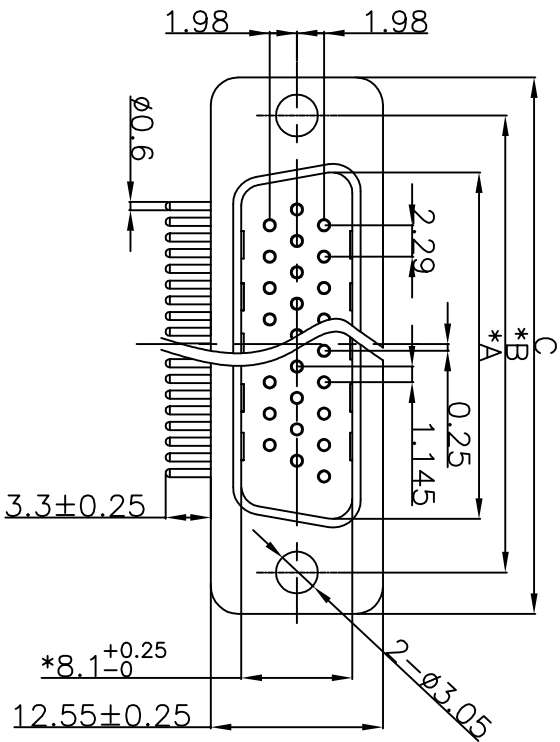

P0(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
015	16.92	24.99	30.81	19.28
026	25.25	33.32	39.14	27.51
044	38.96	47.04	53.04	41.28

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 3AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC

DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE

OPERATION TEMPERATURE: -55C° ~ 125C°

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATED: GOLD FLASH OVER NICKEL

SHELL: SPCC

SHELL PLATED: NICKEL/TIN



东莞市讯颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
XX	±0.38	杨剑玉		2011. 01. 05		HDR XP 公	弯焊板式传统铆合 H=7.2
XXX	±0.25						
XXXX	±0.13						
X* ±0°	X*X ±2°	CHECKED BY:	杨剑玉	DATE :	2011. 01. 05	DRAW NO.	YM-06-0113
UNIT: mm [inch]		APPROVED BY:	胡超	DATE :	2014. 11. 05	PART NO.	HDRXXMMH000000900000072
SCALE:1:1	A版					REMARK	
						MOLD NO.	