
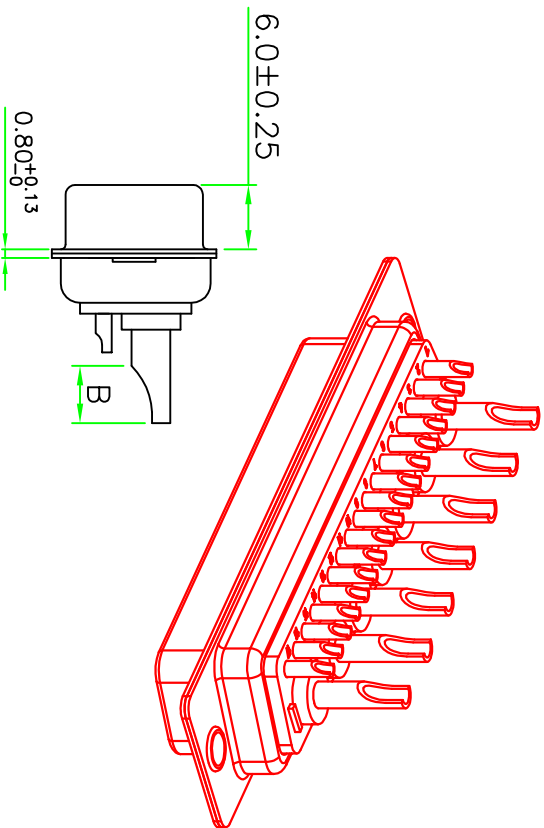
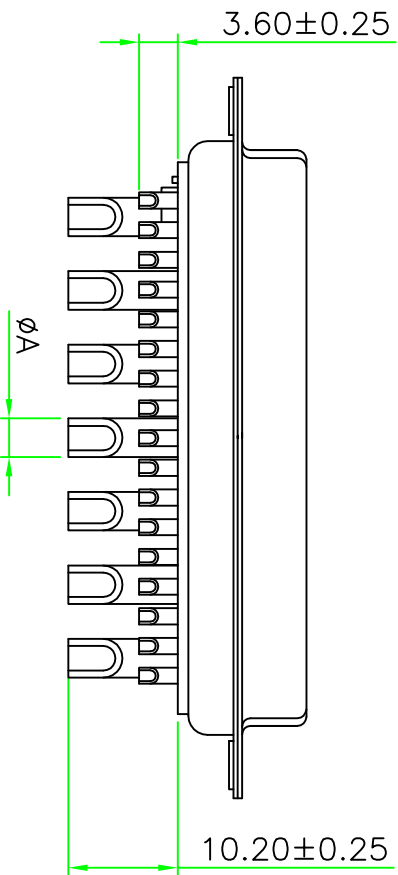


P0(X)	A	B	WIRE	CURRENT RATING(A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

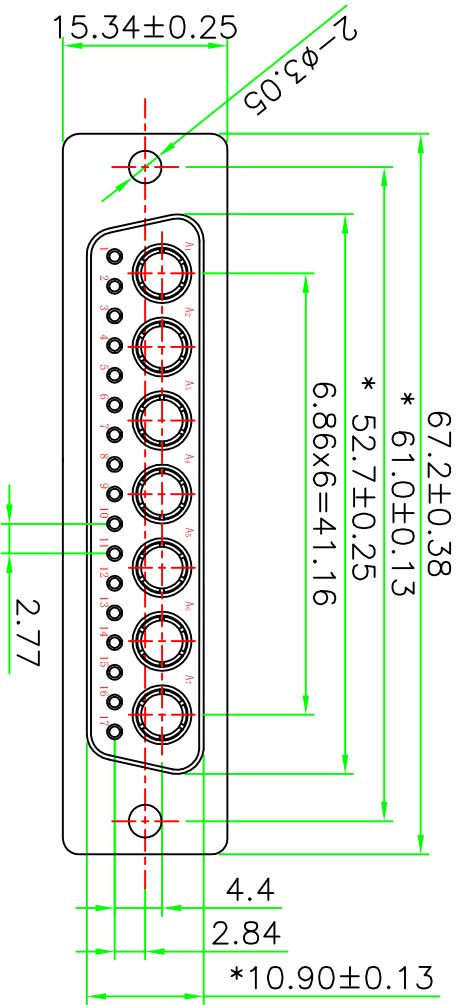

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING : 3.0 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125° .

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° X'° ±1°		DRAWN BY : 杨冬梅 DATE : 2009. 09. 11		PART NAME: 24W7 母 电流焊线式传统铆合	
CHECKED BY: 余飞仙 DATE : 2009. 09. 12		DRAW NO.		XHY-05-3402	
PART NO.		PART NO.		PB24W4FYXH00000000000000	
APPROVED BY: 胡超 DATE : 2010. 01. 30		REMARK			
SCALE: 1:1		SIZE: A4		MOLD NO.	