
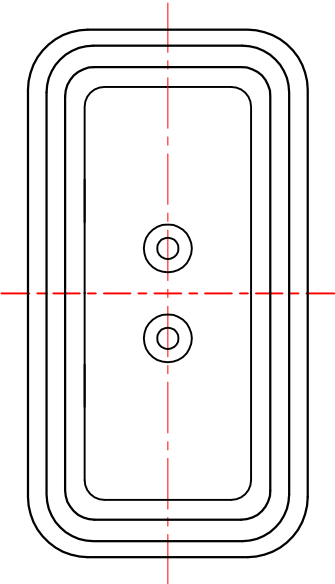
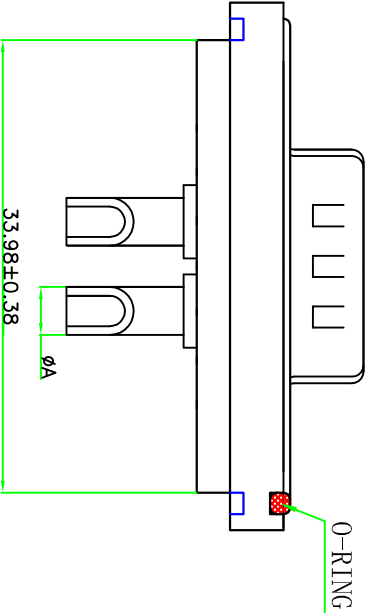
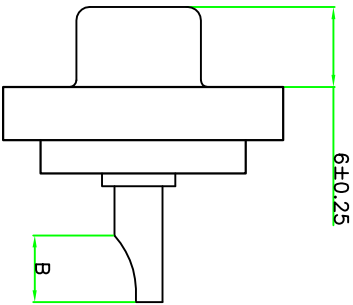


“*” Pivot Dimension

RoHS Component

P0(X)	A	B	WIRE	CURRENT RATING(A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

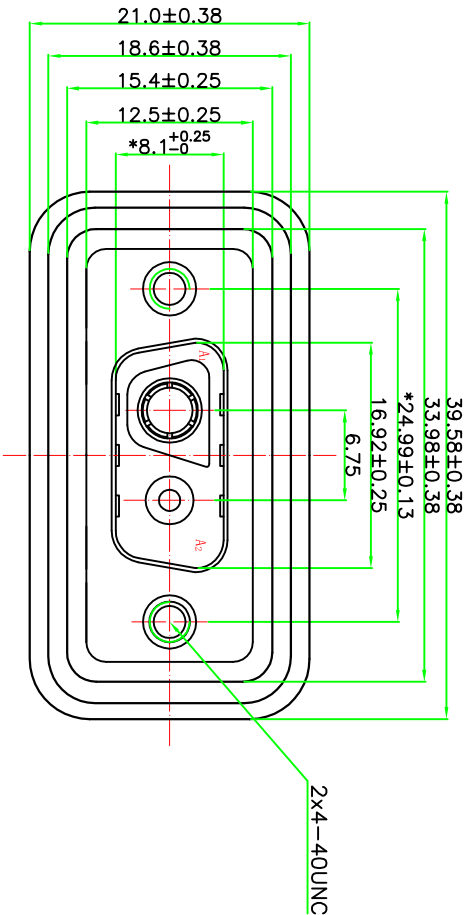

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWED BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉		2010. 05. 15		防水连接器2V2 公 电流插线式传统聊合	
XX	±0.25	侯应文		2010. 05. 15		PART NO.	XHY-05-0261
XXX	±0.13					MOLD NO.	PB02V2MXH000000000000F
X° ±δ°	XX° ±δ°	CHECKED BY:		DATE :		REMARK	
UNIT: mm [inch]		APPROVED BY:		DATE :		DRAW NO.	
SCALE:1:1	SIZE: A4	胡 超		2010. 05. 15			