
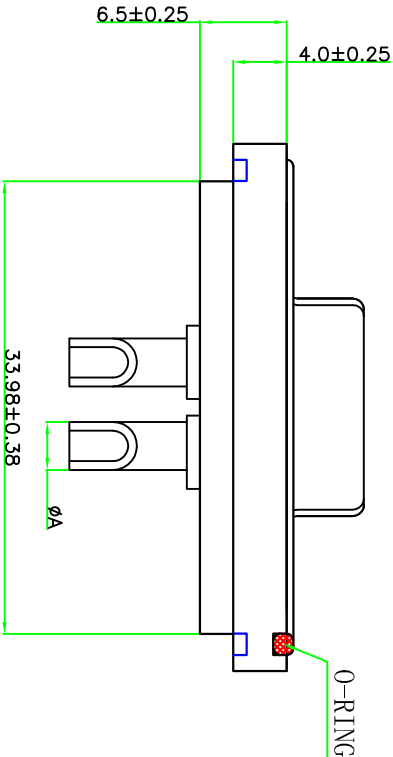



“*” Pivot Dimension

RoHS Component

P0(X)	A	B	WIRE	CIRCUIT RATING(A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

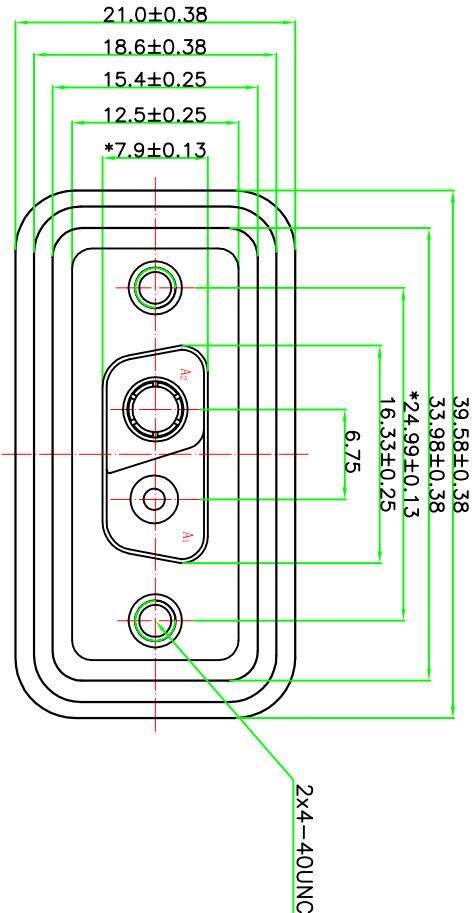

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGOHMS MIN.
TEMPERATURE RATING: -55° ~ +125° .



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉		2010. 05. 15		防水连接器 2V2 母 电流焊线式传统铆合	
XX	±0.25	CHECKED BY:		DATE :		PART NO.	
XXX	±0.13	侯应文		2010. 05. 15		XHY-05-0262	
X' ±δ'	X'X' ±δ²	APPROVED BY:		DATE :		MOLD NO.	
UNIT: mm [inch]		胡 超		2010. 05. 15		P802V2FYHH000000000000P	
SCALE:1:1		SIZE: A4		REMARK		DRAW NO.	