


标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装胶芯
				2	装中心针
				3	压主体
				4	压胶芯
				5	装卡环
				6	成品检验

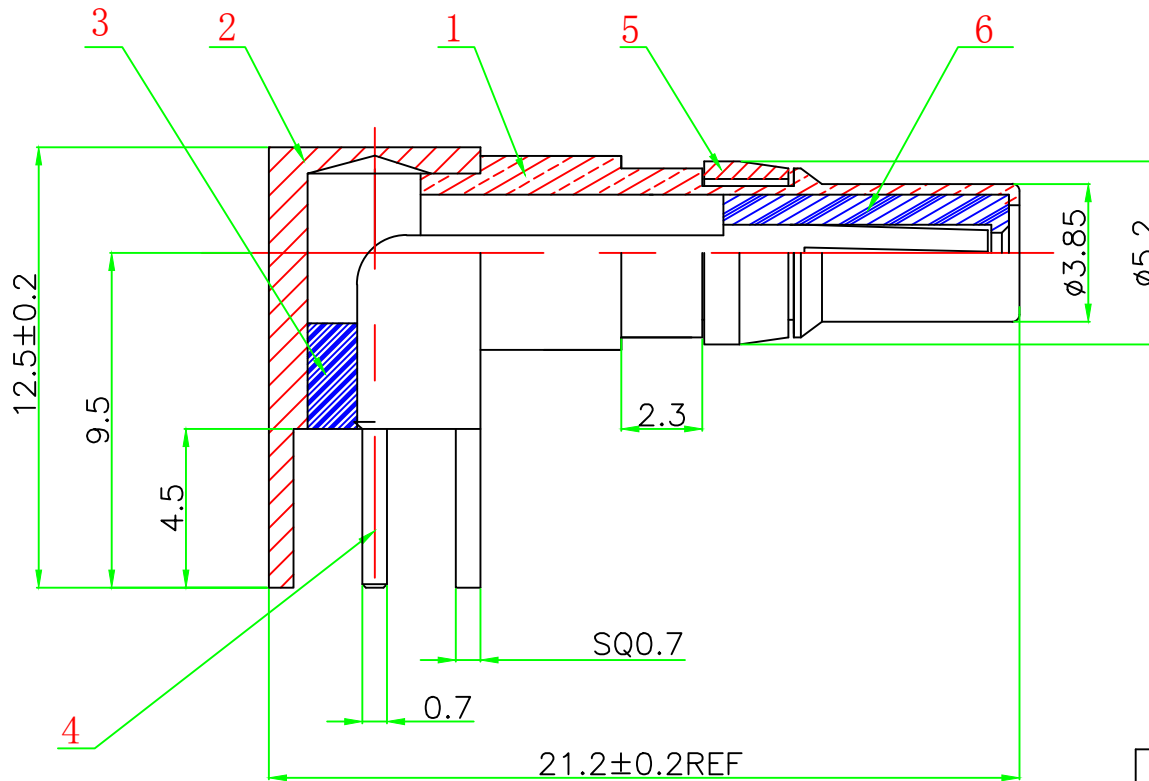

6	PLASTIC (F)	1	XHY-04-0005	Q01017H016000000000800
5	RING	1	XHY-04-0001	Q01914H024500000000000
4	PIN	1	XHY-01-0076	FR08100H2630000000R0000
3	PLASTIC (B)	1	XHY-04-0007	Q01017H030000000000000
2	BODY (B)	1	XHY-01-0067	DW03600H1250000000R0000
1	BODY (F)	1	XHY-01-0066	FR03385H1690000000R0000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OHM.
THE RADIO FREQUENCY RANGE:0~4GHz.
VOLTAGE STANDING WAVE RATIO:1.3MAX
HIGH FREQUENCY CONTACT RESISTANCE:3.0 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:750 V AC FOR 1MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° C~+125° C.



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X.X ±0.30 X.XX ±0.10 X.XXX ±0.05 X° ±5° X.X° ±2°		DRAWN BY :		PART NAME: 混装射频焊线式母端 50Ω	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4		CHECKED BY:	DATE :	DRAW NO.	XHY-07-0015
		APPROVED BY:	DATE :	PART NO.	RFBF50H215006000000000
				REMARK	
				MOLD NO.	