


标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装胶芯
				2	装中心针
				3	压后胶芯
				4	装卡环
				5	成品检验

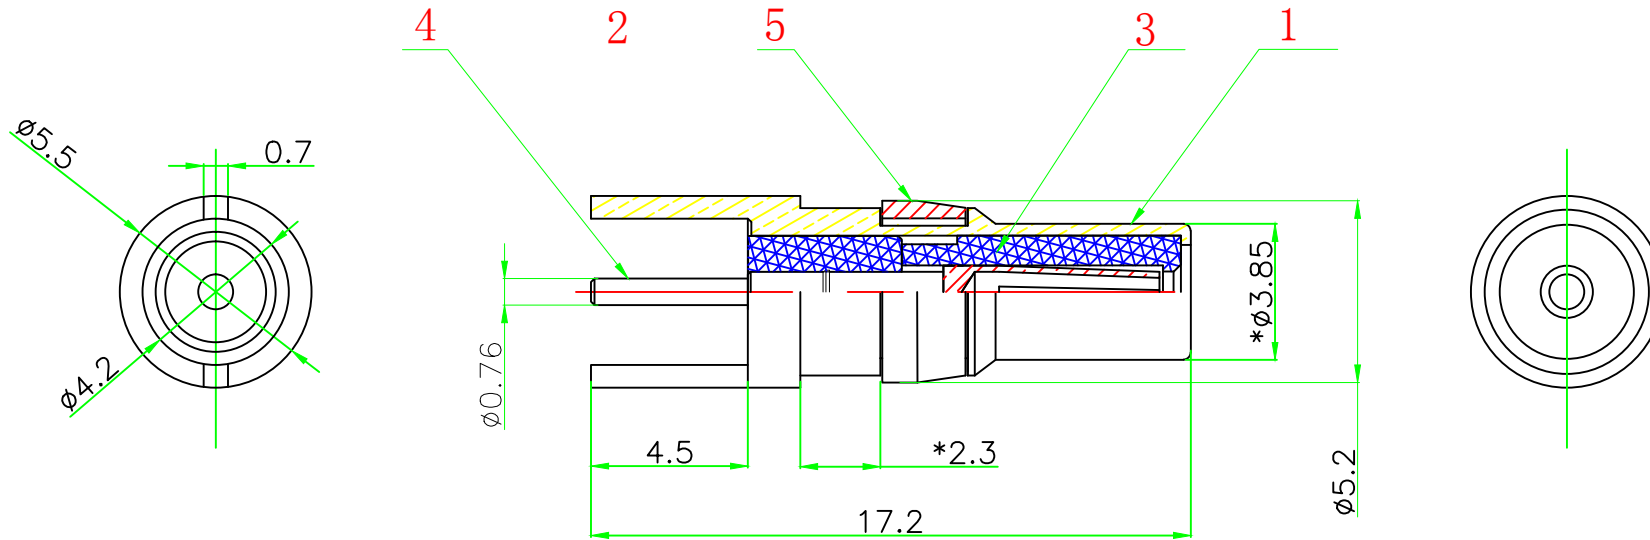

5	RING	1	XHY-04-0001	Q01914H0245011000000000
4	PIN	1	XHY-01-0062	FS08100H1630000000R0000
3	PLASTIC	1	XHY-04-0005	Q01017H0800000000000000
2	PLASTIC (B)	1	XHY-04-0004	Q01017H0440000000000000
1	BODY	1	XHY-01-0065	FSXX385H1720000000R0000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OHM.
THE RADIO FREQUENCY RANGE:0~4GHz.
VOLTAGE STANDING WAVE RATIO:1.3MAX
HIGH FREQUENCY CONTACT RESISTANCE:3.0 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:750 V AC FOR 1MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° C~+125° C.




东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:

XX ±0.30
XXX ±0.10
XXXX ±0.05

X° ±5° X.X° ±2°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

杨剑玉

2010. 05. 15

PART NAME:

混装射频直焊板式母端 50Ω

CHECKED BY:

侯应文

2010. 05. 15

DRAW NO.

XHY-07-0001

PART NO.

RFSF75H1720000000000000

APPROVED BY:

胡超

2010. 05. 15

REMARK

MOLD NO.