


标“\*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装胶芯
				2	装中心针
				3	压主体
				4	压胶芯
				5	装卡环
				6	成品检验

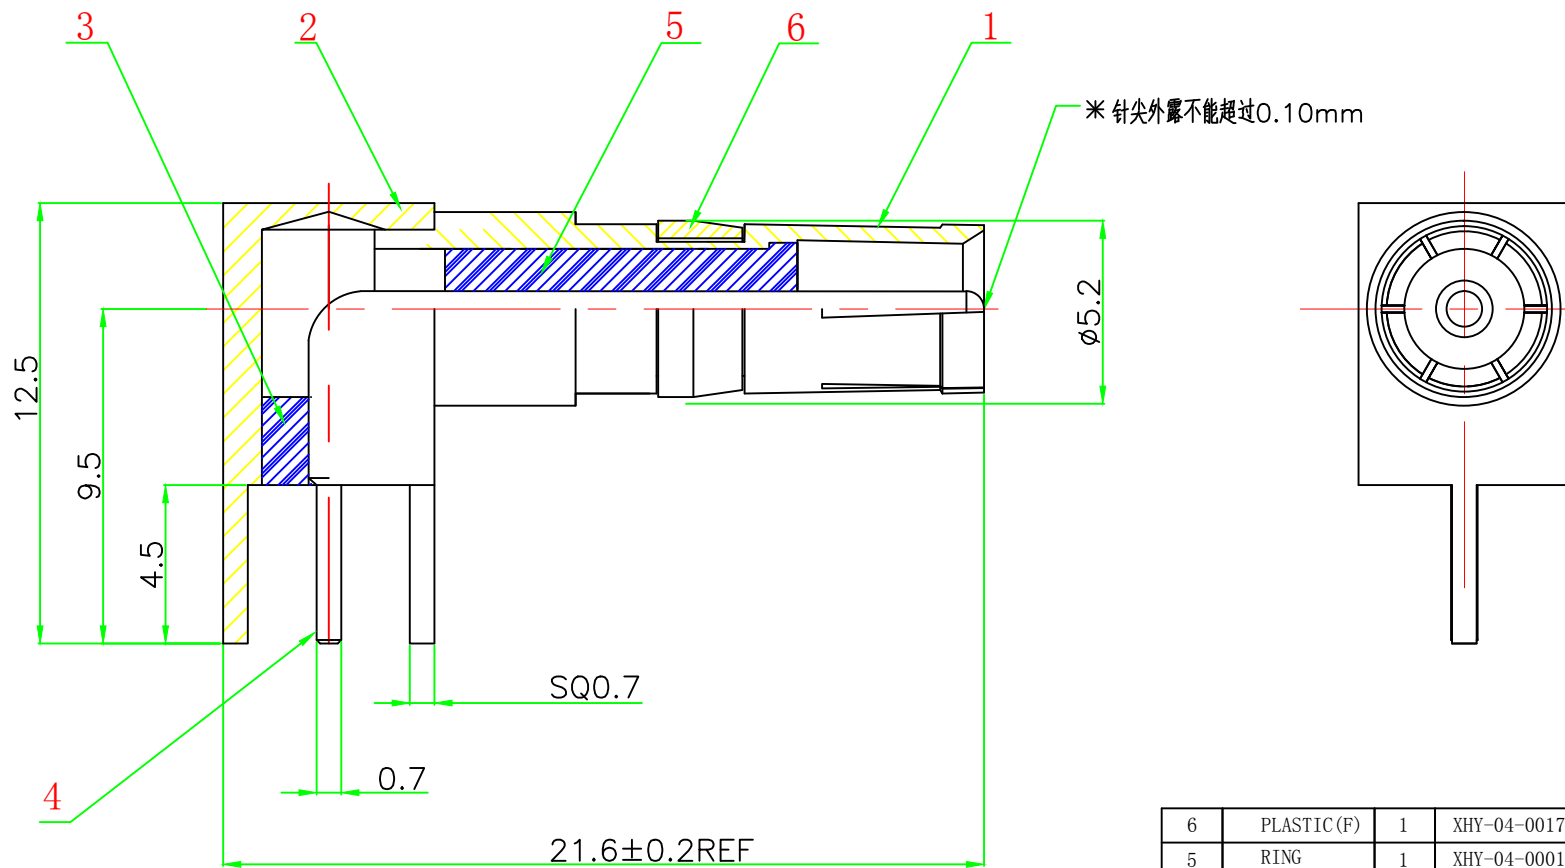

6	PLASTIC(F)	1	XHY-04-0017	Q01017H10000000000000
5	RING	1	XHY-04-0001	Q01914H02450000000000
4	PIN	1	XHY-01-0060	MR01100H275000000R0000
3	PLASTIC(B)	1	XHY-04-0007	Q01017H03000000000000
2	BODY(B)	1	XHY-01-0067	DW03600H125000000R0000
1	BODY(F)	1	XHY-01-0068	MR08395H173000000R0000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

ELECTRICAL CHARACTERISTICS  
 HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OHM.  
 THE RADIO FREQUENCY RANGE:0~4GHz.  
 VOLTAGE STANDING WAVE RATIO:1.3MAX  
 HIGH FREQUENCY CONTACT RESISTANCE:3.0 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE:750 V AC FOR 1MINUTE.  
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.  
 TEMPERATURE RATING:-55° C~+125° C.



东莞市迅颢原精密连接器有限公司  
 Dongguan Signalorigin Precision Connector Co.,Ltd

<b>TOLERANCE:</b> XX ±0.30 X.XX ±0.10 X.XXX ±0.05 X° ±5°    X.X° ±2°	DRAWN BY :		PART NAME: 混装射频焊线式公端子 50Ω	
	CHECKED BY:	DATE :	DRAW NO.	XHY-07-0007
UNIT: mm [inch] SCALE:1:1    SIZE: A4	APPROVED BY:		PART NO.	RFBM50H21600600000000
	DATE :		REMARK	
			MOLD NO.	