


标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装胶芯
				2	装中心针
				3	装卡环
				4	成品检验
				5	

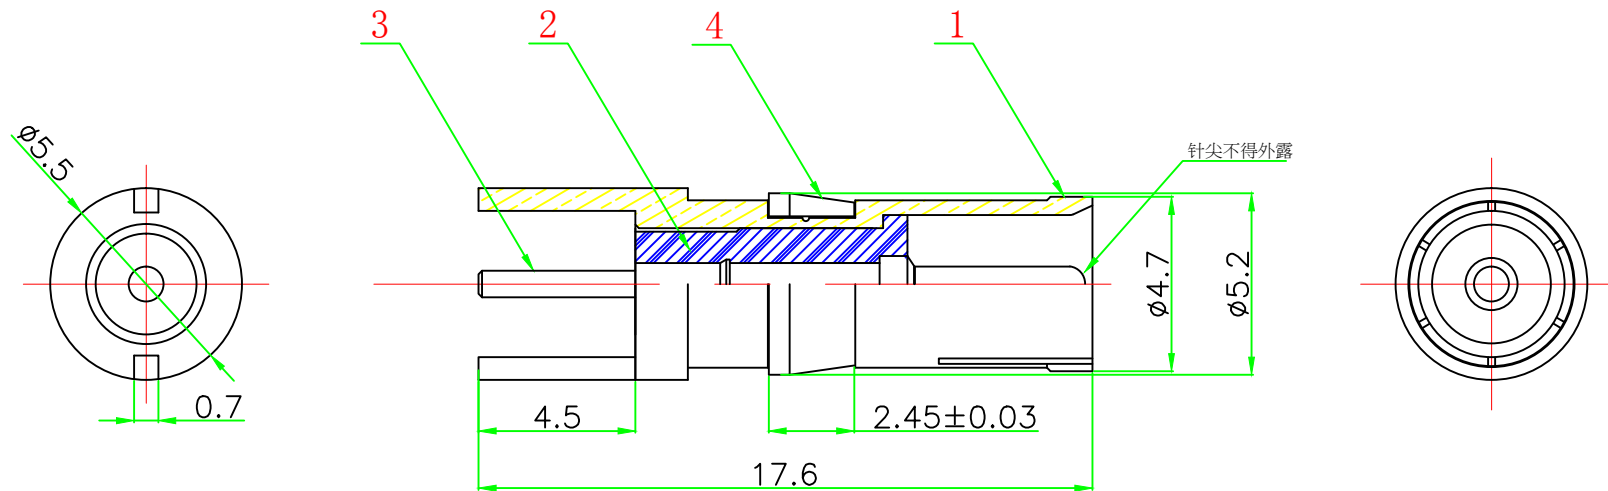

4	RING	1	XHY-04-0001	Q01914H024501100000000
3	PIN	1	XHY-01-0064	MS03100H175000000R0000
2	PLASTIC	1	XHY-04-0003	Q01017H078000000000000
1	BODY	1	XHY-01-0058	MS08395H176006000R0000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OHM.
 THE RADIO FREQUENCY RANGE:0~4GHz.
 VOLTAGE STANDING WAVE RATIO:1.3MAX
 HIGH FREQUENCY CONTACT RESISTANCE:3.0 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:750 V AC FOR 1MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING:-55° C~+125° C.



东莞市迅颢原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: XX ±0.30 XXX ±0.10 XXXX ±0.05 X* ±5° X.X* ±2°	DRAWN BY :	PART NAME: 混装射频直焊板式公端 50Ω	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	DRAW NO.: XHY-07-0003
	APPROVED BY:	DATE :	PART NO.: RFSM50H17600000000000
		REMARK	
		MOLD NO.	