
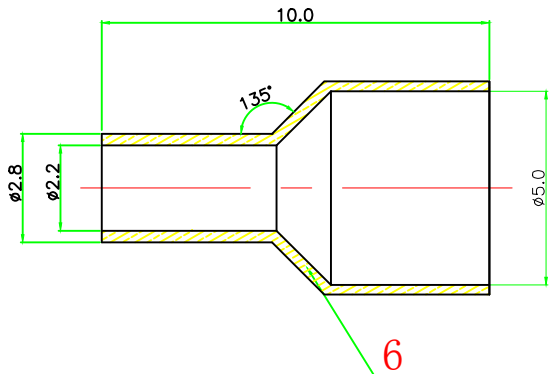



标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装胶芯
				2	装中心针
				3	压主体
				4	装卡环
				5	成品检验

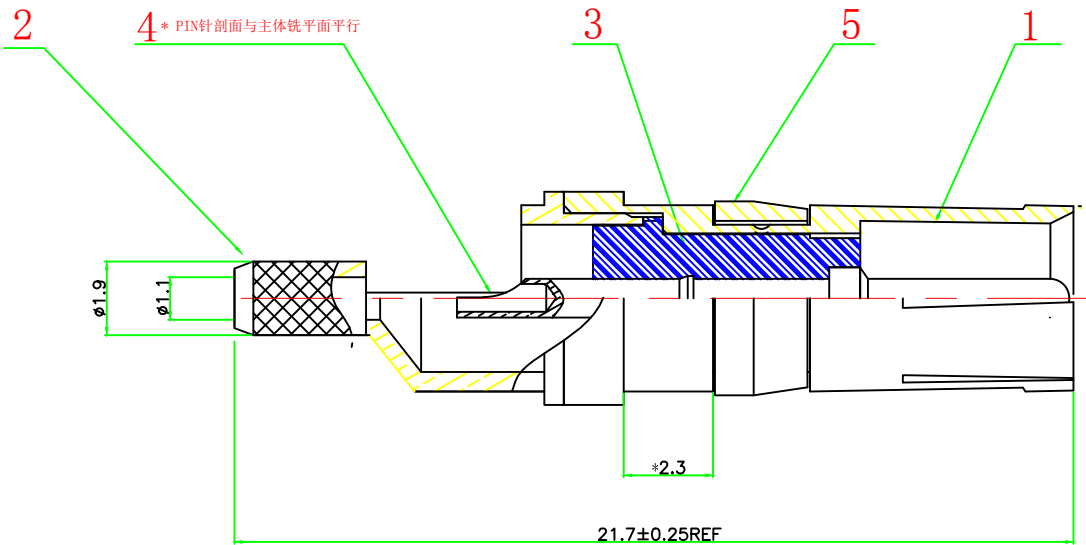

6	TUBE		XHY-01-0053	DW01220H10600000000000
5	RING		XHY-04-0001	Q01914H0245XXXXX000000
4	PIN		XHY-01-0070	MB03100H1580000000R0000
3	PLASTIC		XHY-04-0013	Q01017H0710000000000000
2	BODY (B)		XHY-01-0052	DW03110H1060000000R0000
1	BODY (F)		XHY-01-0050	DW08395H1320000000R0000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OHM.
THE RADIO FREQUENCY RANGE:0~4GHz.
VOLTAGE STANDING WAVE RATIO:1.3MAX
HIGH FREQUENCY CONTACT RESISTANCE:3.0 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:750 V ACFOR 1MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° C~+125° C.



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X.X ±0.30 X.XX ±0.10 X.XXX ±0.05 X° ±5° X.X° ±2°		DRAWN BY :		PART NAME: 混装射频焊线式公端 50Ω(Φ1.1孔)	
CHECKED BY:		DATE :		DRAW NO.	XHY-07-0013
APPROVED BY:		DATE :		PART NO.	RFBM50H2170060000S0000
UNIT: mm [inch]				REMARK	
SCALE:1:1		SIZE: A4		MOLD NO.	