
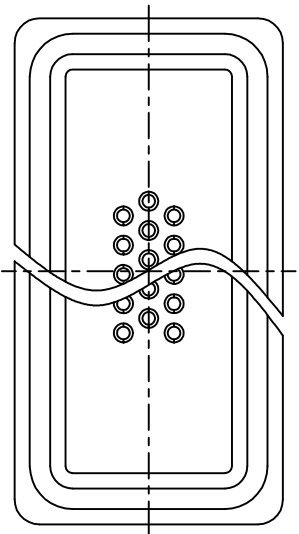
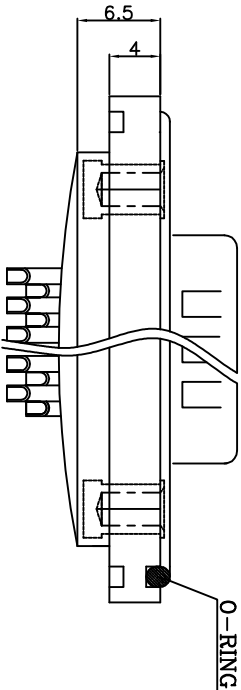



所用物料均符合ROHS标准

标“*”为重点检验尺寸

P.0(XXX)	No. of Contact	A ±0.25	B ±0.13	C ±0.38	D ±0.13	E ±0.25
015	15	16.92	24.99	33.98	39.58	33.98
026	26	25.25	33.32	42.30	47.90	42.30
044	44	38.96	47.04	56.02	61.62	55.92

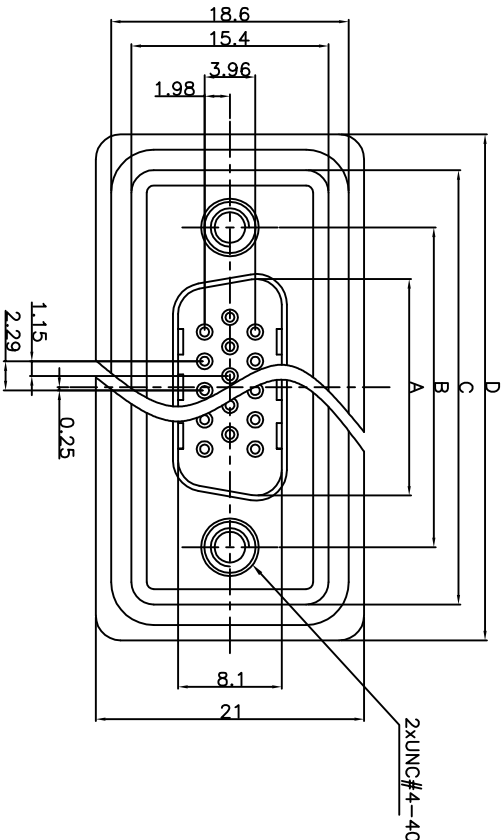

MATERIALS AND FINISH

SHELL : STEEL,TIN FINISHED
INSULATOR : PBT UL94V-0 BLACK COLOR
SIGNAL CONTACT: COPPER ALLOY,GOLD PLATED
WATERTIGHT FRAME: PBT UL94-0 BLACK COLOR
O-RING : SILICONE
EPOXY SEALANT: EPOXY

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING: 3.0 AMPS
SIGNAL CONTACT RESISTANCE: 15mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.
INSULATION RESISTANCE: 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +105°C
DEGREE OF PROTECTION: IP67 ACCORD

			
东莞市迅颢原精密连接器有限公司			
Dongguan Signalorigin Precision Connector Co.,Ltd			
TOLERANCE: XX ±0.38 XXX ±0.25 XXXX ±0.13 X* ±2° X*Y ±0.5°		DRAWN BY : CY. FANG DATE : 2010.10.10	
CHECKED BY : CR. H DATE : 2010.10.10		PART NAME: HDB XP 公 防水系列	
APPROVED BY : 胡 超 DATE : 2010.10.13		PART NO. HDBXXMH20000000000000F	
UNIT: mm [inch]		REMARK	
SCALE:1:1 A版		MOLD NO.	