
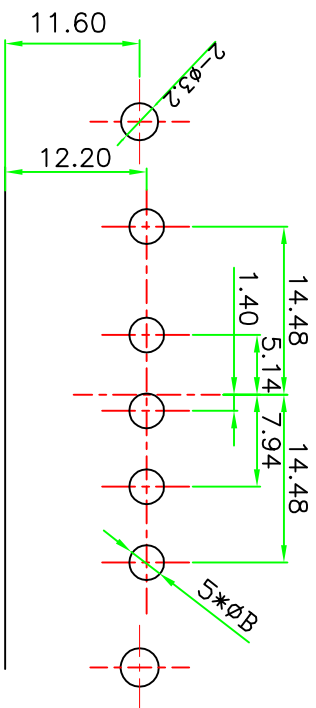
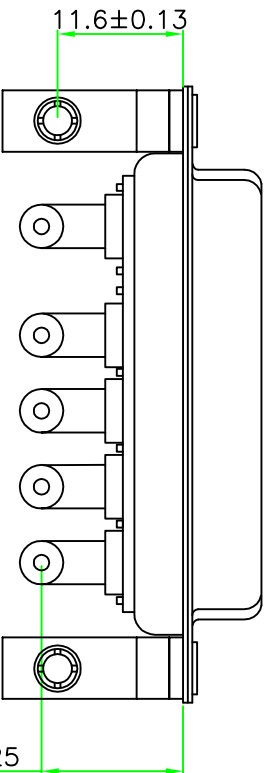
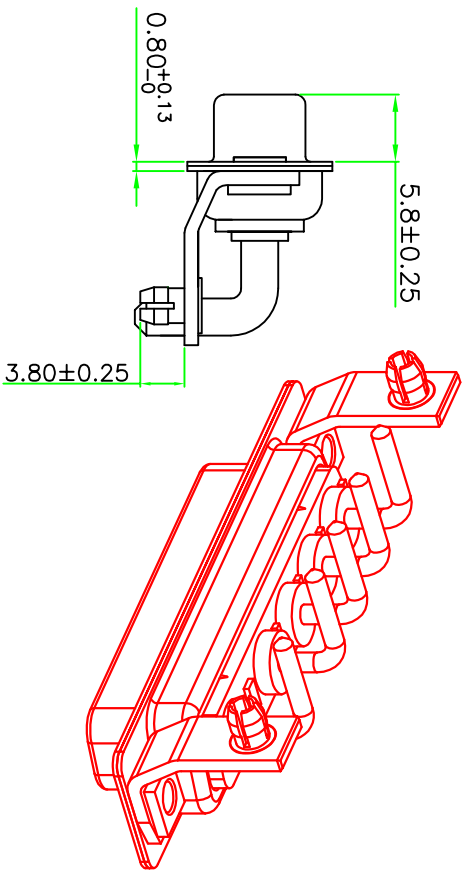


“*” Pivot Dimension

ROHS Component

P0(X)	电流强度(I)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

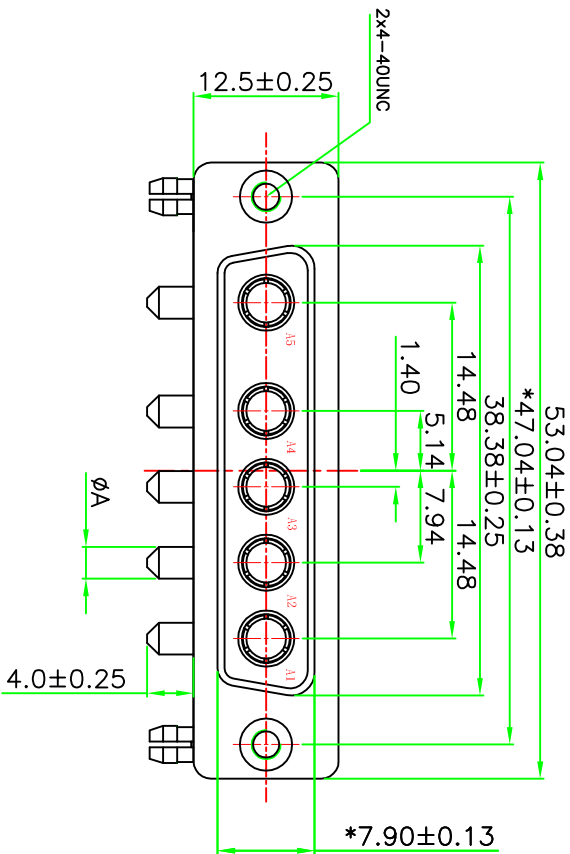

PCB LAYOUT

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~+125°.



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉		2010. 05. 15		5W5 母 电流弯焊板式铆11.6支架	
X.X	±0.25	CHECKED BY: 侯应文		DATE : 2010. 05. 15		PART NO. XHY-05-1028	
X.XX	±0.13						
X° ±5°	X.X° ±2°	APPROVED BY: 胡超		DATE : 2010. 05. 15		REMARK	
UNIT: mm [inch]	SCALE:1:1	SIZE: A4		DRAW NO.			