


标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期

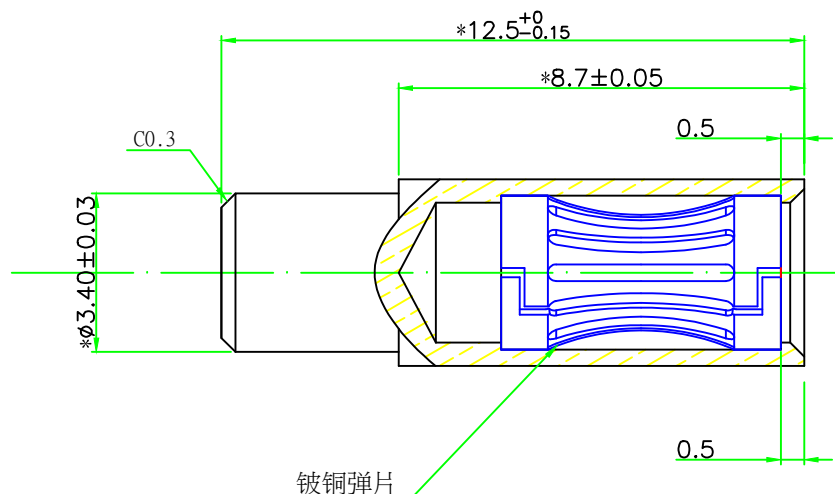

说明:

1. 材质: 主体 (C3604) / 卡簧 (C17200) 镍底80U"min , 镀金4U".
2. 额定电流: 20A.
3. 额定电压: 250V.
4. 接触阻抗: 4mOHM (MAX),
3. 插拔次数: 1000 (min).

2	BODY	1	XHY-01-0197	GS03236H1700060030S010
1	CLIPS	1	XHY-04-0053	Q03614H0320060030000000
NO	DESCRIPTION	QTY	DRAW NO	PART NO

 东莞市迅颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd			
TOLERANCE: XX ±0.20 XX ±0.10 XXX ±0.05 X.* ±2° X.X* ±0.5°	DRAWN BY : 杨剑玉	DATE : 2015.12.18	PART NAME: φ2.36*12.5直焊板式冠簧
	CHECKED BY: 方翠燕	DATE : 2015.12.18	DRAW NO. XHY-01-0196
	APPROVED BY: 胡越	DATE : 2015.12.18	PART NO. GS03236H1250060404Y017
UNIT: mm [inch] SCALE:1:1 SIZE: A4		REMARK	
		MOLD NO.	