

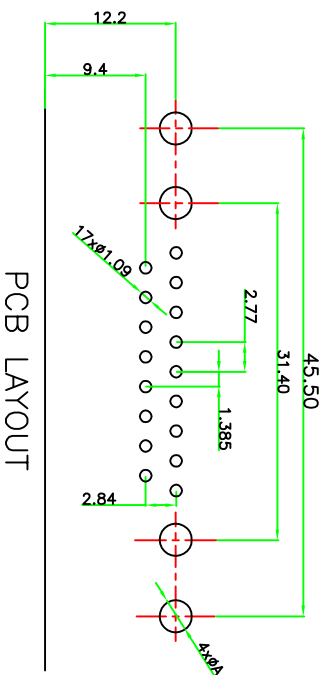
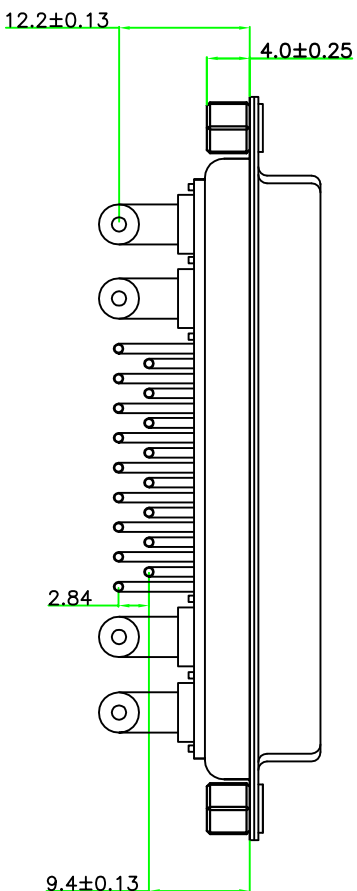
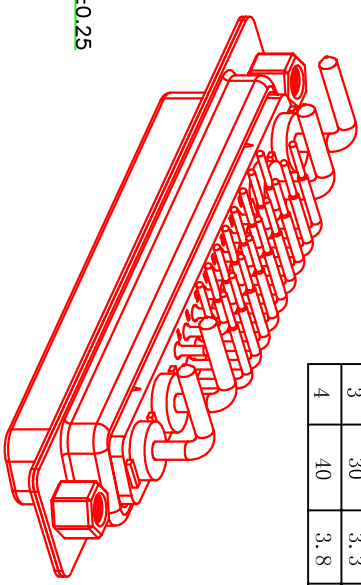


PO(X)	电流强度(A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

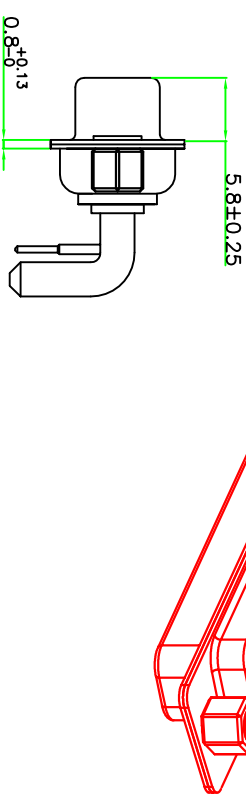

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONECT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

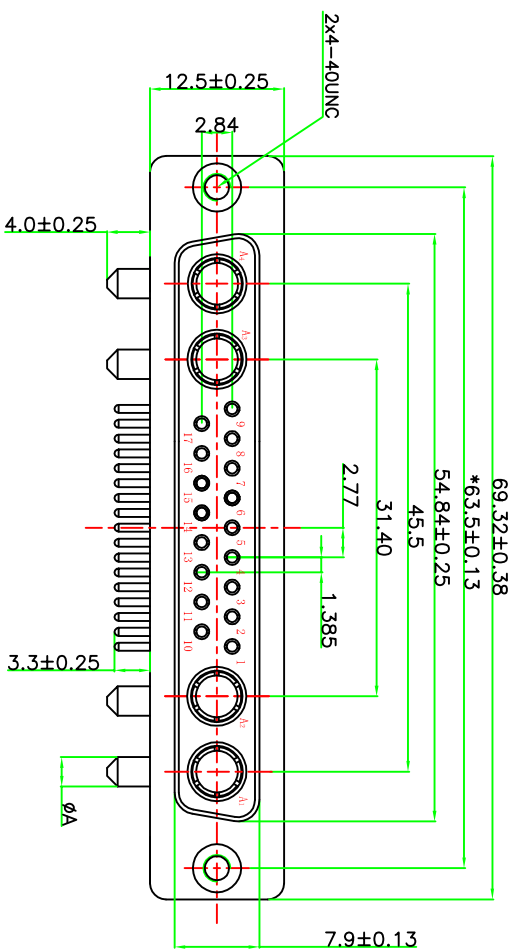

东莞市迅颖原精密连接器有限公司
Dongguan Signalongin Precision Connector Co.,Ltd

TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° X'° ±1°		DRAWN BY : 杨冬梅	DATE : 2009. 09. 11	PART NAME: 21W4 母 电流弯焊板式 反抽4-40UNC*4.0空心螺母
CHECKED BY: 余飞仙		DATE : 2009. 09. 12	DRAW NO. XHY-05-3240	PART NO. PR21W4FYH02000XXXX0000
APPROVED BY: 胡超		DATE : 2010. 01. 30	REMARK	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4				