
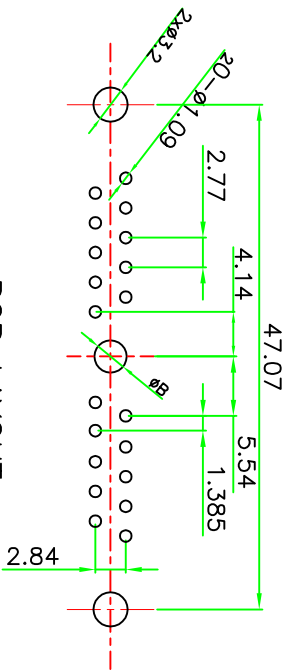
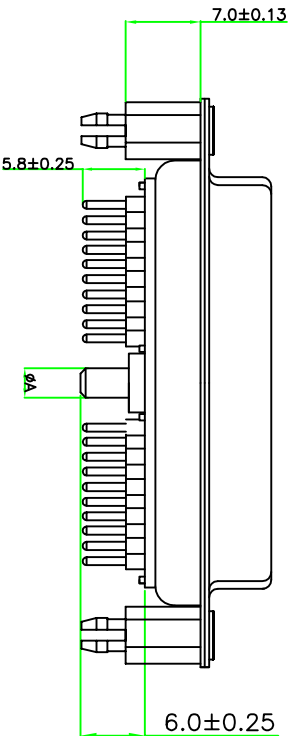
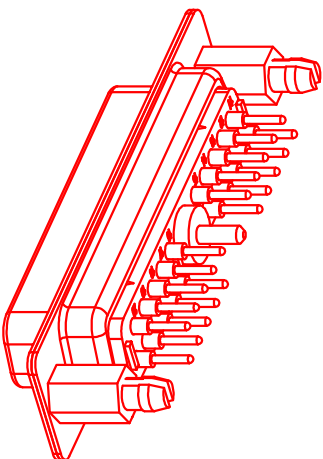



PO(X)	电流强度(A)	∅A	PCB ∅B
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

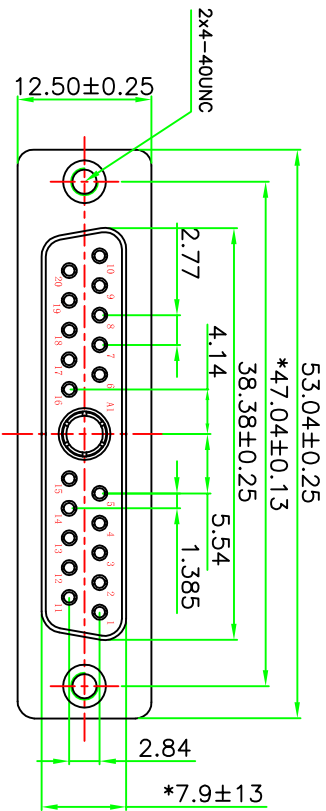

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED
FORK:COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE::2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

		东莞市迅颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd	
TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° XX° ±1°		PART NAME: 21W1 母 电流直焊板式铆7.0鱼叉	
DRAWED BY : 杨冬梅		DATE : 2009. 09. 11	
CHECKED BY: 余飞仙		DATE : 2009. 09. 12	
APPROVED BY: 胡超		DATE : 2010. 01. 30	
UNIT: mm [inch]		REMARK	
SCALE:1:1 SIZE: A4		MOLD NO.	

PCB LAYOUT