
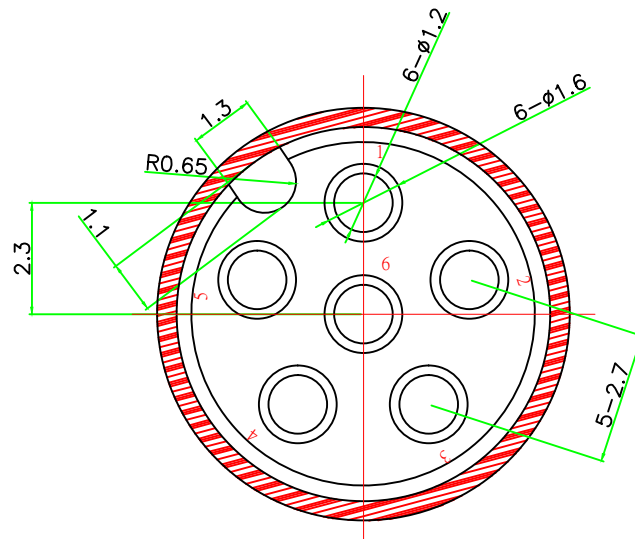


标“*”为重点检验尺寸

所用物料均符合ROHS标准

版本	变更人	变更内容	日期	站别	加工工艺流程
X		初版发行		1	装端子
				2	压端子
				3	装硅胶圈
				4	全检/包装

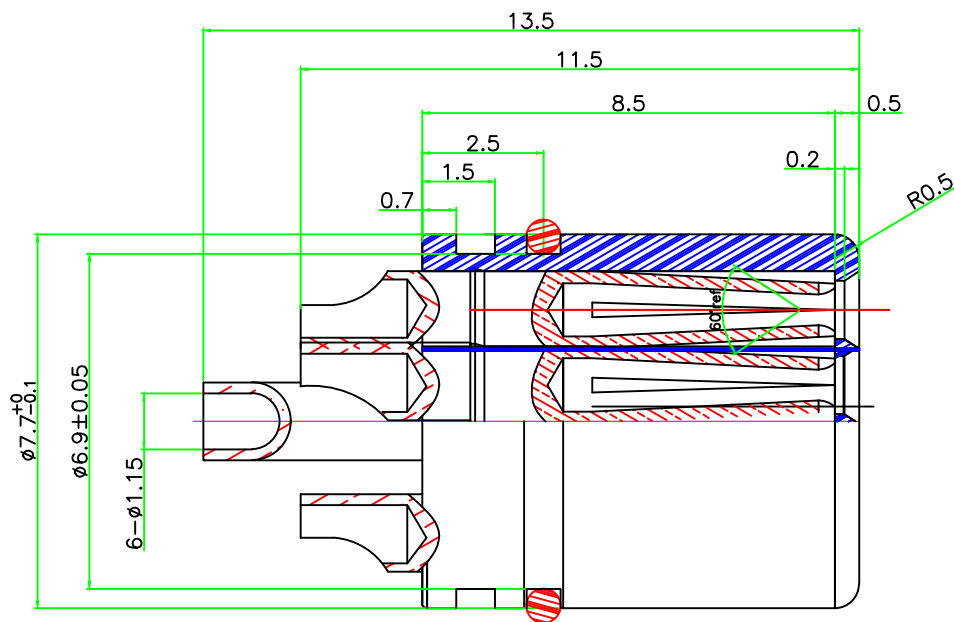

说明:

- 主体:PBT4130 ;颜色:蓝色Pantone299U. 防火UL-94V0.
- 端子材质H62镀金1U”.
- 额定电流: 3A.
- 额定电压: 120V.
- 接触阻抗: 30mΩ (MAX).
- 绝缘阻抗:1000MΩ (mix).
- 介质耐压: AC750V.
- 工作温度: -40~+125° C.
- 寿命: 500T.

4	RUBBER BAND	1	XHY-04-0080	Q02800H24180000000N001
3	CONNECTOR(S)	5	XHY-01-0317	FB04100H1100060010N001
2	CONNECTOR(L)	1	XHY-01-0317	FB04100H1300060010N001
1	BODY	1	XHY-03-0081	PQFT006HL19S012000N001
NO	DESCRIPTION	QTY	DRAW NO	PART NO



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.* ±2° X.X* ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME: 6P 圆形母头 (N001)	
	CHECKED BY:	DATE :	DRAW NO.	XHY-10-0010
	APPROVED BY:	DATE :	PART NO.	YB06F15000000000301000
			REMARK	
			MOLD NO.	