
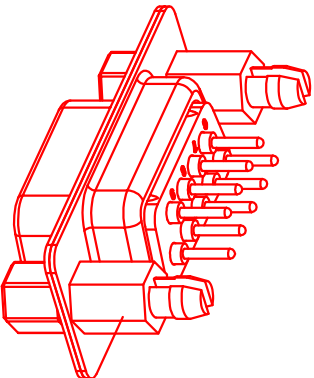



“\*” Pivot Dimension

RoHS Component

| P0(XXX) | A ±0.25 | B ±0.13 | C ±0.38 | D ±0.25 |
|---------|---------|---------|---------|---------|
| 009     | 16.33   | 24.99   | 30.81   | 19.28   |
| 015     | 24.66   | 33.32   | 39.14   | 27.51   |
| 025     | 38.38   | 47.04   | 53.04   | 41.28   |
| 037     | 54.94   | 63.50   | 69.32   | 57.71   |

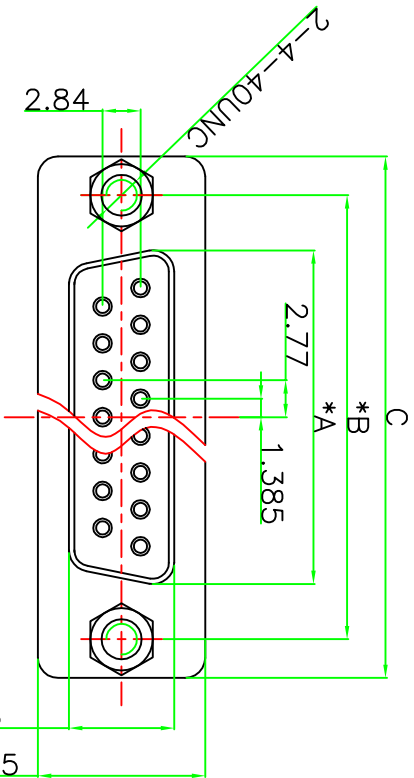

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 5AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC

DIELECTRIC STRENGTH: 500V AC RMS for 1minute

OPERATION TEMPERATURE: -55℃ ~ 125℃

2. MATERIAL:

INSULATOR: PBT+30% G.F (UL94V-0)



CONTACT: COPPER ALLOY

CONTACT PLATED: GOLD FLASH OVER NICKEL

SHELL: SPCC

SHELL PLATED: NICKEL/TIN

FORK: COPPER ALLOY/PLATED NICKEL

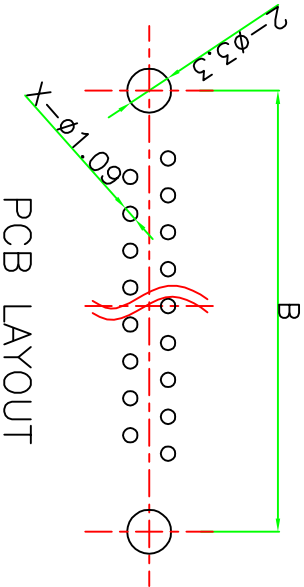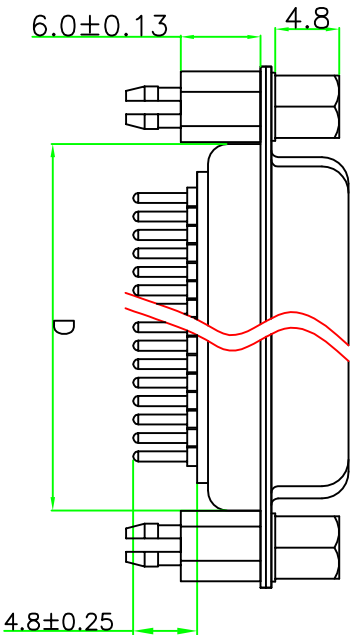

东莞市迅颢原精密连接器有限公司  
Dongguan Signalorigin Precision Connector Co.,Ltd

|                                                                  |  |              |            |                                      |
|------------------------------------------------------------------|--|--------------|------------|--------------------------------------|
| TOLERANCE:<br>X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2° |  | DRAWN BY :   | DATE :     | PART NAME:                           |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | 杨剑玉          | 2010.05.15 | DP XP 母 直焊板式铜6.0鱼叉<br>镀4-40UNC*4.8螺丝 |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | CHECKED BY:  | DATE :     | PART NO.                             |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | 侯应文          | 2010.05.15 | XHV-06-0034                          |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | APPROVED BY: | DATE :     | MOLD NO.                             |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | 胡超           | 2010.05.15 | PDPXXVH2600000000000000              |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | SCALE:1:1    | SIZE: A4   | REMARK                               |
| X ±0.40<br>XX ±0.20<br>XXX ±0.10<br>X* ±5° X** ±2°               |  | DRAW NO.     |            |                                      |