
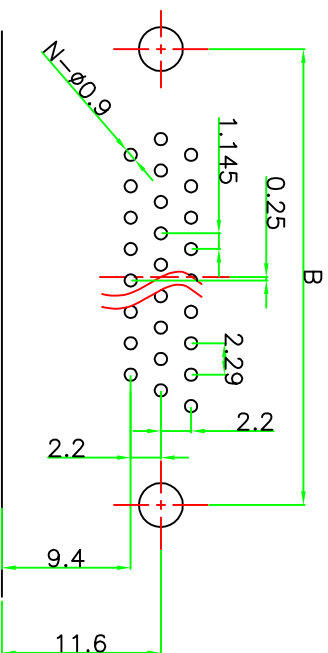
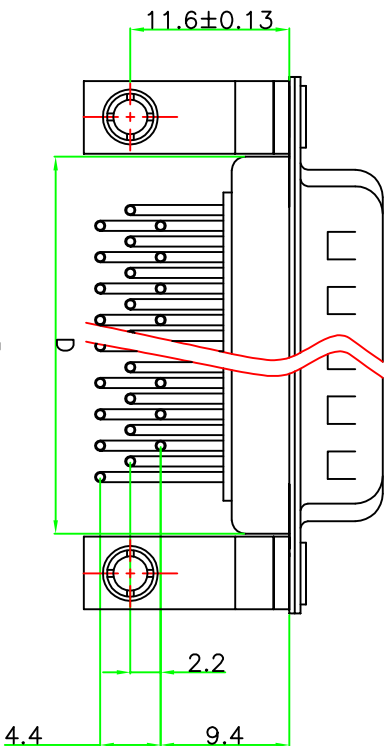
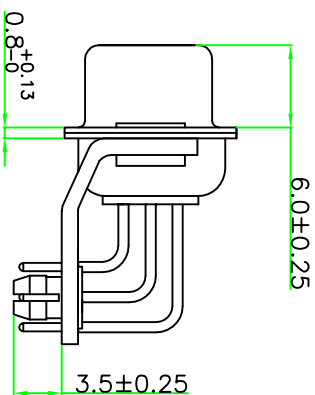


所用物料均符合ROHS标准

标“*”为重点检验尺寸

P0(XXX)	A ± 0.25	B ± 0.13	C ± 0.38	D ± 0.25
015	16.92	24.99	30.81	19.28
026	25.25	33.32	39.14	27.51
044	38.96	47.04	53.04	41.28

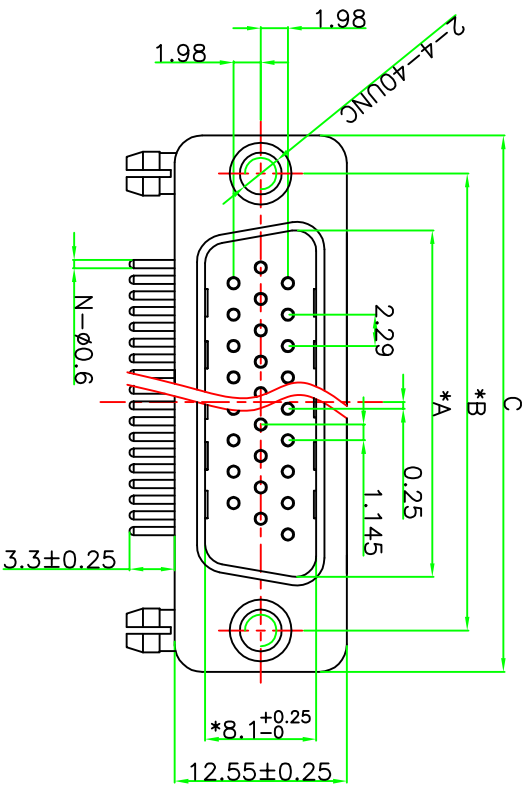

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 3AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC

DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE

OPERATION TEMPERATURE: -55℃ ~125℃

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATED: GOLD FLASH OVER NICKEL

SHELL: SPCC

SHELL PLATED: NICKEL/TIN

BRACKET: COPPER ALLOY PLATED Ni



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: XX ± 0.38 XXX ± 0.25 XXX ± 0.13 X* $\pm 0^{\circ}$ X* $\pm 2^{\circ}$		DRAWN BY: 杨剑玉	DATE: 2011.01.05	PART NAME: HDR XP 公 弯焊板式脚11.6支架 H=9.4
UNIT: mm [inch]		CHECKED BY: 杨剑玉	DATE: 2011.01.05	DRAW NO. XHY-06-0119
SCALE: 1:1 A版		APPROVED BY: 胡超	DATE: 2014.11.05	PART NO. HDRXXMMH1100000000094
				REMARK
				MOLD NO.