

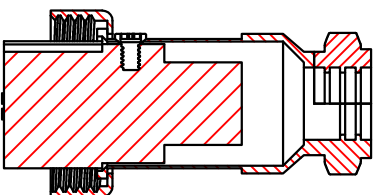
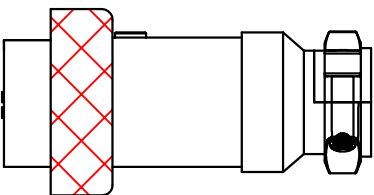
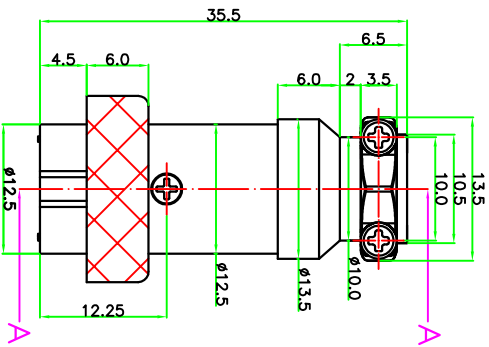


“*” Pivot Dimension


RoHS Component



SECTION A-A



MATERIALS AND FINISH
SHELL:ZINC ALLOY MATERIAL, Ni FINISHED.
CONNECTOR INSULATOR:Bakelite BLACK.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, Silvery FINISHED.
NUT:COPPER ALLOY MATERIAL, Ni FINISHED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10AMPS.
THE WORKING VOLTAGE:500V.
HIGH POWER CONTECT RESISTANCE:10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1500 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-40° ~+85° .

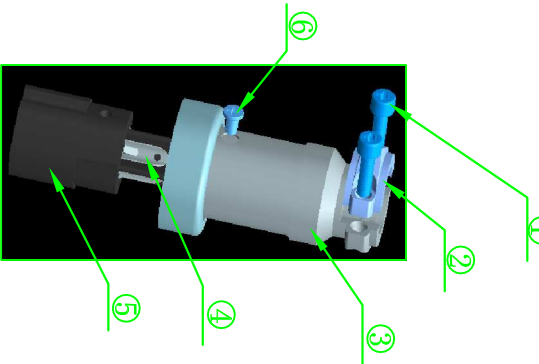

⑥	螺丝 2	铁/镀镍
⑤	胶 芯	电木
④	插 针	铜合金/镀银
③	主 体 2	锌合金/镀银
②	主 体 1	锌合金/镀银
①	螺 丝 1	铁/镀镍
系号	名 称	材 质
东莞市迅颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd		
TOLERANCE: X. ±1.0 XX ±0.5 XXX ±0.3 X° ±9° X'° ±8°		
DRAWN BY: 杨剑玉 CHECKED BY: 杨剑玉 APPROVED BY: 胡超		
DATE: 2016.03.10 DATE: 2016.03.10 DATE: 2016.03.11		
PART NAME: M16圆形电缆连接器 4P 母座 DRAW NO. XHY-05-501-N02 PART NO. 1128-2041AJD-25-501002 REMARK		
SCALE:1:1 SIZE: A4		