
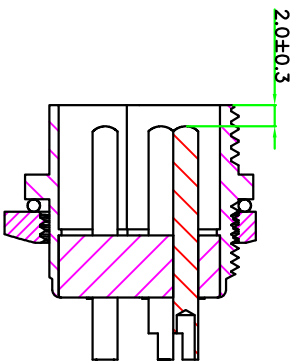
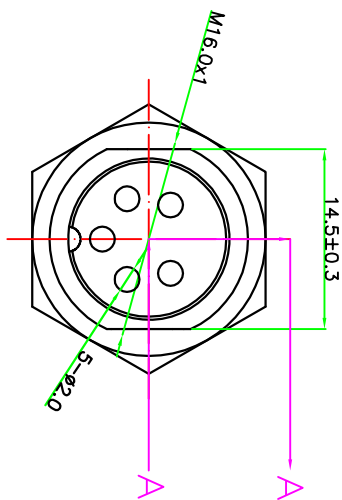
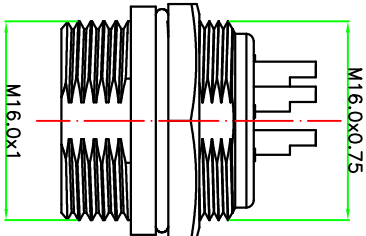
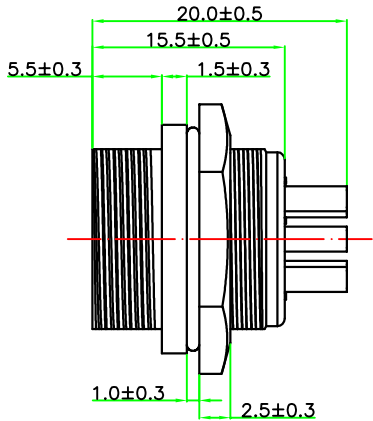



“*” Pivot Dimension

RoHS Component

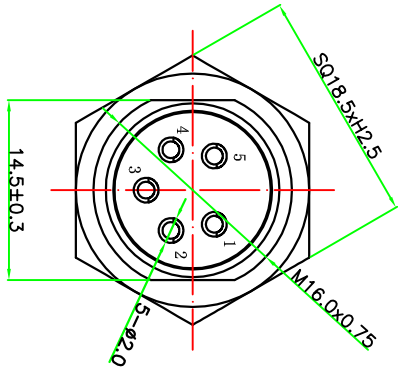

SECTION A-A

MATERIALS AND FINISH
SHELL: ZINC ALLOY MATERIAL, Ni FINISHED.
CONNECTOR INSULATOR: Bakelite BLACK.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, Silvery FINISHED.
NUT: COPPER ALLOY MATERIAL, Ni FINISHED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10AMPS.
THE WORKING VOLTAGE: 500V.
HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1500 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -40° ~ +85° .

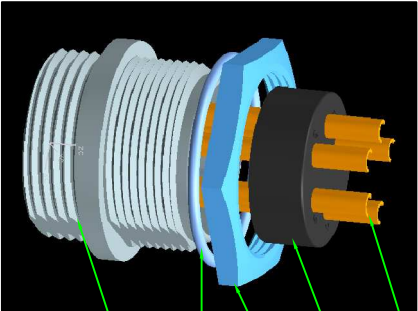

⑤	主体	锌合金/镀镍
④	垫圈	铁/镀镍
③	六角螺母	铜合金/镀镍
②	胶芯	电木
①	插针	铜合金/镀银
系号	名称	材质
东莞市迅颖原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd		
TOLERANCE: XX ±1.0 XXX ±0.5 X.XX ±0.2 X° ±9° X.X° ±2°		
UNIT: mm [inch] SCALE: 1:1 SIZE: A4		
DRAWN BY : 杨剑玉	DATE : 2016. 03. 10	PART NAME: M16圆形电缆连接器 5P 公座
CHECKED BY: 杨剑玉	DATE : 2016. 03. 10	DRAW NO. XHY-05-501-NO3
APPROVED BY: 胡超	DATE : 2016. 03. 10	PART NO. 1128-1051AJD-25-501003
REMARK		
MOLD NO.		