
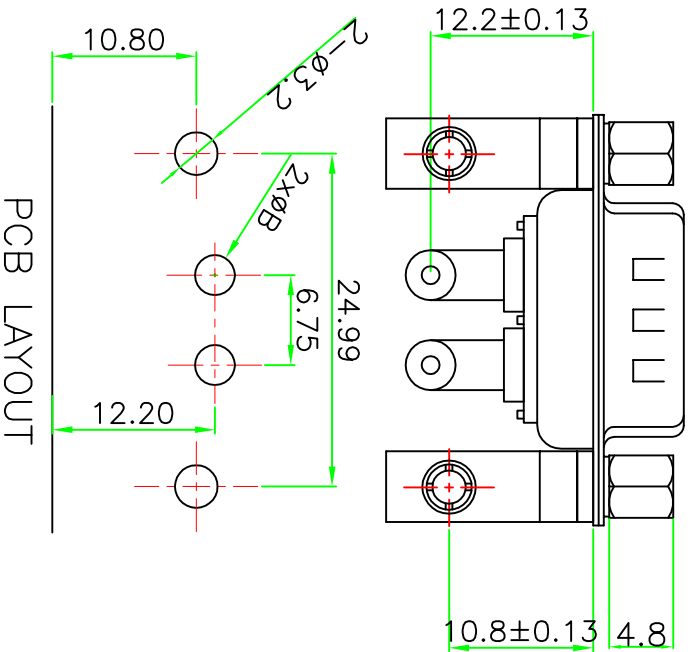
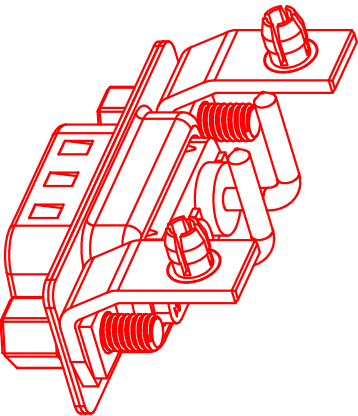
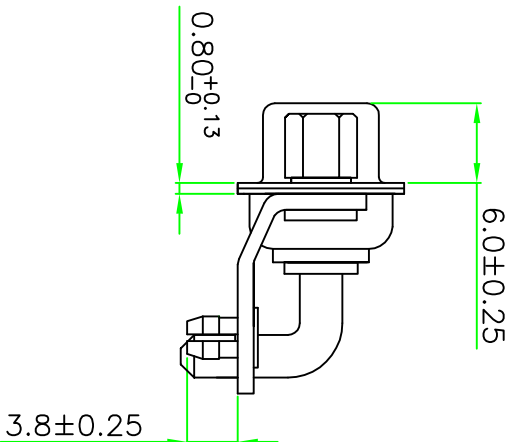


“*” Pivot Dimension

RoHS Component

POV	电流强度 (A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.05
3	30	3.3	3.6
4	40	3.8	4.10

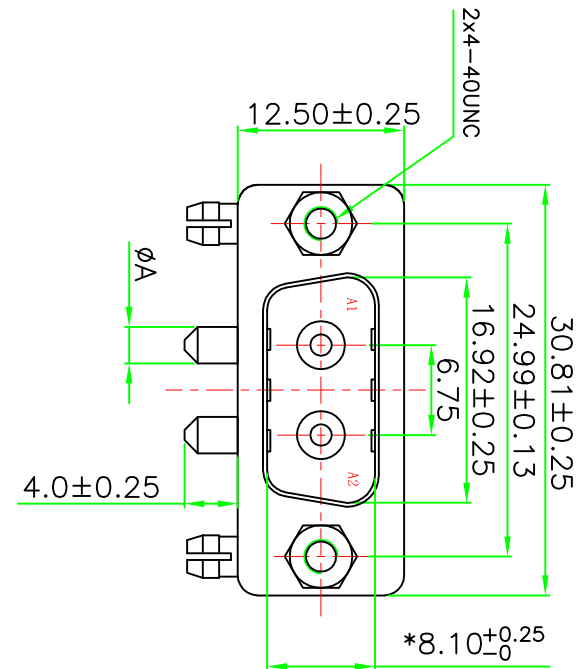

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
BRACKET/SCREW: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~+125° .

东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉		2010. 05. 15		20W 公 电流弯焊板式脚10.8支架	
XX	±0.25	CHECKED BY:		DATE :		PART NO.	
XXX	±0.13	侯应文		2010. 05. 15		XH1-05-0421	
X* ±5°	X* ±2°	APPROVED BY:		DATE :		MOLD NO.	
		胡超		2010. 05. 15		PRO2W2MXH10000XXXX0000	
UNIT: mm [inch]		SCALE:1:1		SIZE: A4		REMARK	
						DRAW NO.	