
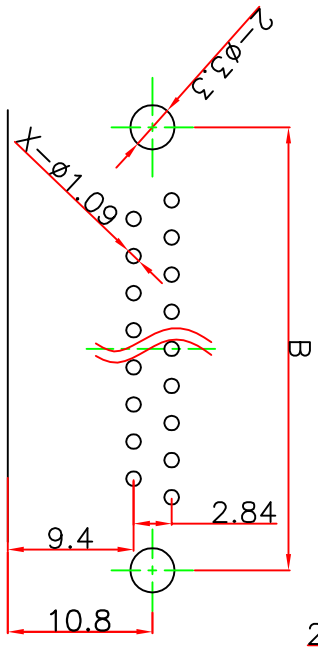
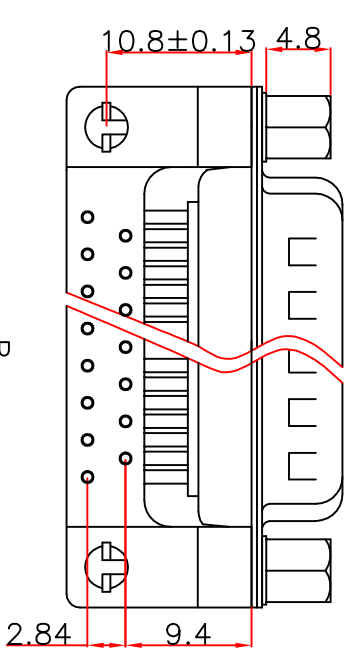



RoHS Component

“*” Pivot Dimension

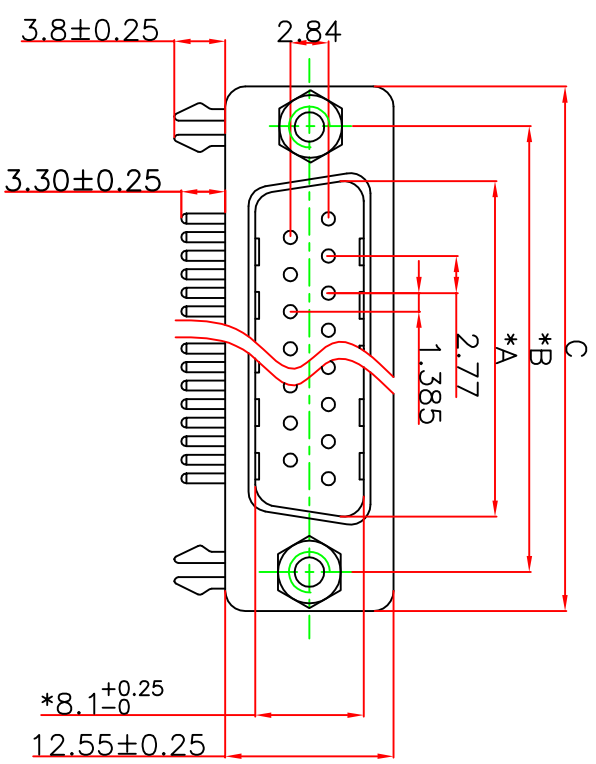

P0(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
009	16.92	24.99	30.81	19.28
015	25.25	33.32	39.14	27.51
025	38.96	47.04	53.04	41.28
037	55.42	63.50	69.32	57.71

NOTICE :
1. ELECTRIC:

- DIELECTRIC RATING: 300V
- CONTACT CURRENT RATING: 5AMP
- CONTACT RESISTANCE: 15mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC
- DIELECTRIC STRENGTH: 500V AC RMS for 1minute
- OPERATION TEMPERATURE: -55C° ~ 125C°

2. MATERIAL:
- INSULATOR: PBT+30% G. F (UL94V-0)
 - CONTACT: COPPER ALLOY
 - CONTACT PLATED: GOLD FLASH OVER NICKEL
 - SHELL: SPCC
 - SHELL PLATED: NICKEL/TIN
 - BRACKET: PBT+30% G. F (UL94V-0)



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: XX ±0.38 XXX ±0.25 XXXX ±0.13 X*.45° X* ±2°		DRAWN BY: 杨冬梅 DATE: 2009.08.22		PART NAME: DR XP 公 弯焊板式铜塑胶支架 德4-40UN*4.8螺丝 H=9.4	
CHECKED BY: 杨冬梅 DATE: 2009.08.22		DRAW NO.: XHY-06-0023		PART NO.: PDRXXXXMH18000090000094	
APPROVED BY: 胡超 DATE: 2009.08.22		REMARK:		MOLD NO.:	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4					

PCB LAYOUT