
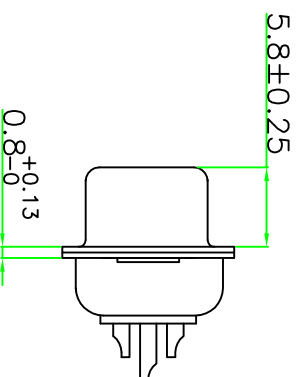
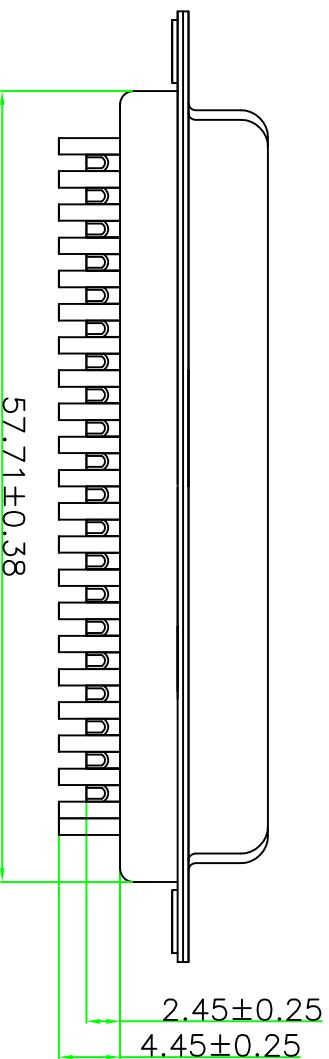


“\*” Pivot Dimension

RoHS Component

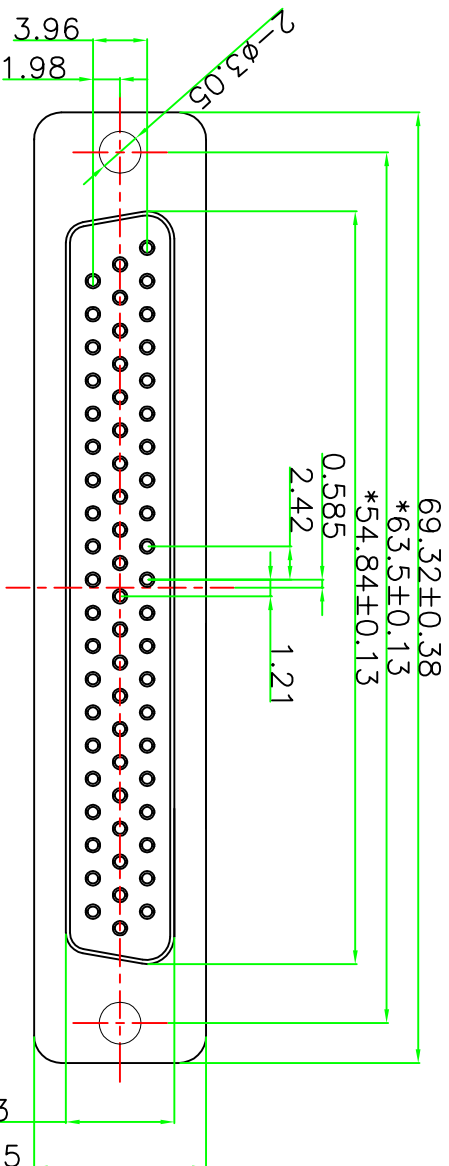

NOTICE :

1. ELECTRIC:
  - DIELECTRIC RATING: 300V
  - CONTACT CURRENT RATING: 3AMP
  - CONTACT RESISTANCE: 15mΩ MAX.
  - INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC
  - DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE
  - OPERATION TEMPERATURE: -55C° ~125C°
2. MATERIAL:
  - INSULATOR: PBT+30% G. F (UL94V-0)
  - CONTACT : COPPER ALLOY
  - CONTACT PLATED: GOLD FLASH OVER NICKEL
  - SHELL: SPCC
  - SHELL PLATED: NICKEL/TIN



**东莞市迅颢原精密连接器有限公司**  
Dongguan Signalorigin Precision Connector Co., Ltd

<b>TOLERANCE:</b> XX ±0.38 XXX ±0.25 XXXX ±0.13 X° ±0° XX' ±1'		<b>DRAWN BY :</b> 杨冬梅 <b>DATE :</b> 2009.12.16		<b>PART NAME:</b> HDB 62 母 焊线式传统聊合	
<b>UNIT:</b> mm [inch] SCALE: 1:1		<b>CHECKED BY :</b> 杨剑玉 <b>DATE :</b> 2014.11.05		<b>DRAW NO.:</b> XHV-06-0192	
<b>APPROVED BY :</b> 胡超 <b>DATE :</b> 2014.11.05		<b>PART NO.:</b> HDB062FH000000900000000		<b>REMARK</b>	
<b>MOLD NO.</b>					