




RoHS Component

"*" Pivot Dimension

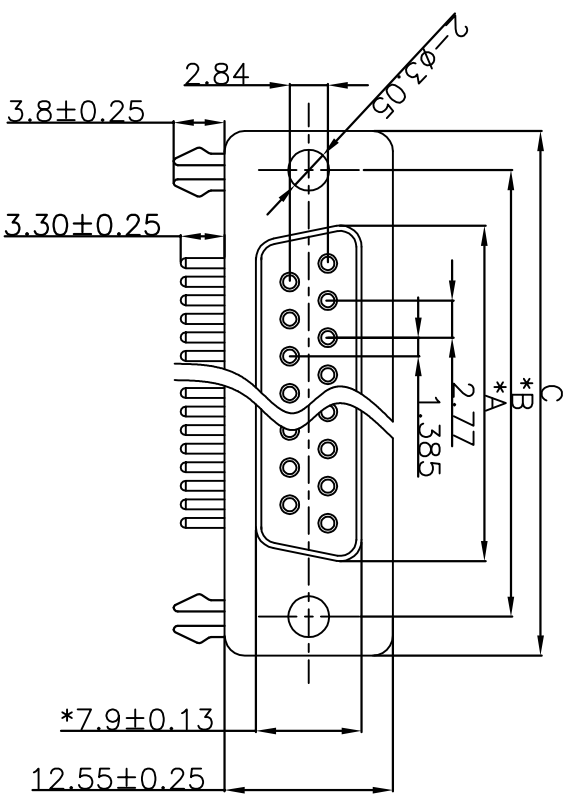

P0(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
009	16.33	24.99	30.81	19.28
015	24.66	33.32	39.14	27.51
025	38.38	47.04	53.04	41.28
037	54.84	63.50	69.32	57.71

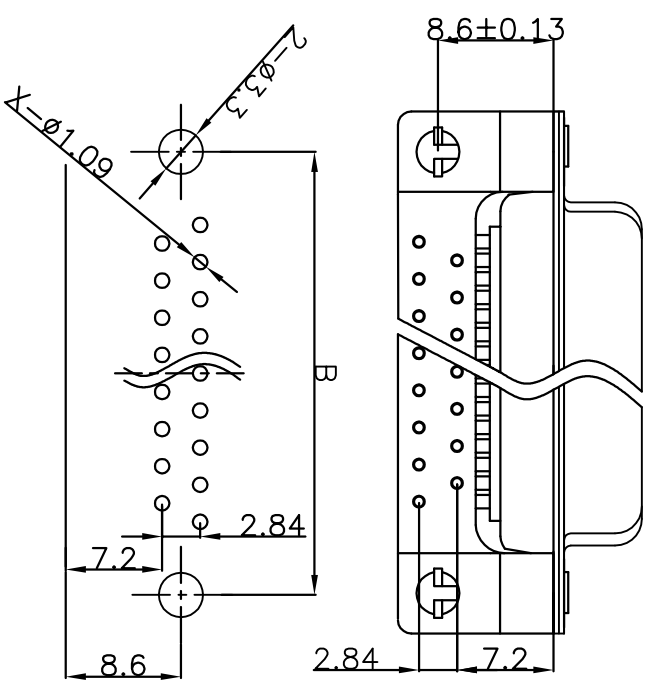

PCB LAYOUT

NOTICE :

- ELECTRICE:
 - DIELECTRIC RATING: 300V
 - CONTACT CURRENT RATING: 5AMP
 - CONTACT RESISTANCE: 15mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC
 - DIELECTRIC STRENGTH: 500V AC RMS for 1minute
 - OPERATION TEMPERATURE: -55°C ~125°C
- MATERIAL:
 - INSULATOR: PBT+30% G. F (UL94V-0)
 - CONTACT: COPPER ALLOY
 - CONTACT PLATED: GOLD FLASH OVER NICKEL
 - SHELL: SPCC
 - SHELL PLATED: NICKEL/TIN
 - BRACKET: PBT+30% G. F (UL94V-0)



东莞市迅颢原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: XX ±0.38 XXX ±0.25 XXXX ±0.13 X*.45° X*X*.45°		DRAWN BY : 杨冬梅		DATE : 2009.08.22		PART NAME: DR XP 母 弯插板式侧壁胶支架 H=7.2	
CHECKED BY : 杨冬梅		DATE : 2009.08.22		DRAW NO.: XHY-06-0030		PART NO.: PDRXXXXPH15000090000072	
APPROVED BY : 胡超		DATE : 2009.08.22		REMARK		MOULD NO.	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4							