
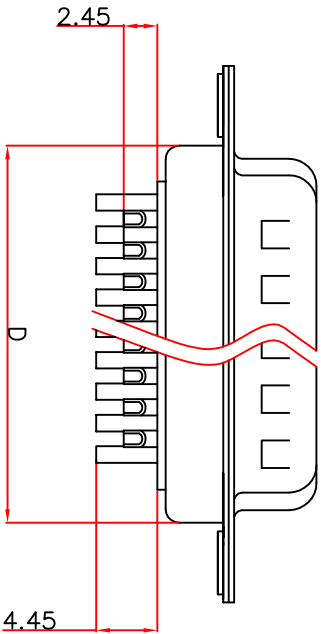



所用物料均符合ROHS标准

标“*”为重点检验尺寸

P0(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
015	16.92	24.99	30.81	19.28
026	25.25	33.32	39.14	27.51
044	38.96	47.04	53.04	41.28

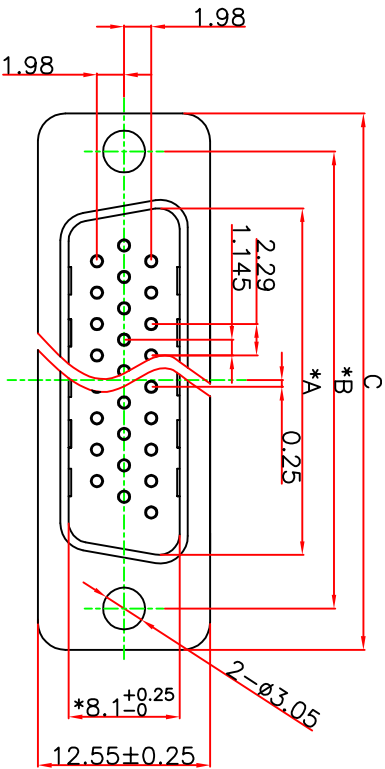

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 3AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC

DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE

OPERATION TEMPERATURE: -55C° ~ 125C°

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATED: GOLD FLASH OVER NICKEL

SHELL: SPCC

SHELL PLATED: NICKEL/TIN



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWED BY :		DATE :		PART NAME:	
XX	±0.38	杨剑玉		2011. 01. 05		HDB XP 公 焊线式传统铆合	
XXX	±0.25	CHECKED BY:		DATE :		DRAW NO.	XHY-06-0101
XXX	±0.13	杨剑玉		2011. 01. 05		PART NO.	HDBXXMMH0000000900000000
X* ±0°	X*Y ±2°	APPROVED BY:		DATE :		REMARK	
UNIT: mm [inch]		胡 超		2014. 11. 05		MOLD NO.	
SCALE:1:1	A版						