

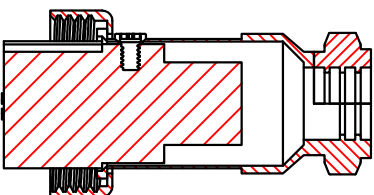
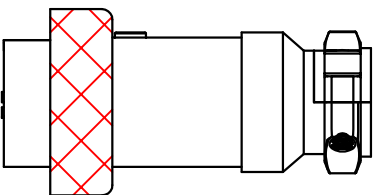


“\*” Pivot Dimension


RoHS Component

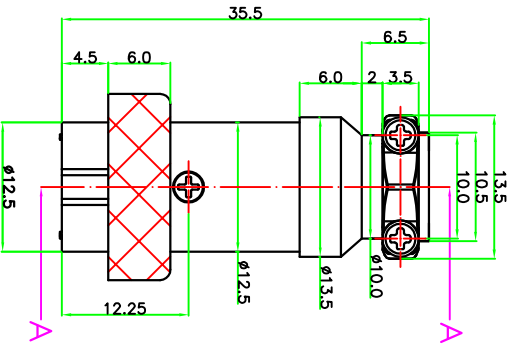

SECTION A-A



MATERIALS AND FINISH  
SHELL:ZINC ALLOY MATERIAL, Ni FINISHED.  
CONNECTOR INSULATOR:Bakelite BLACK.  
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, Silvery FINISHED.  
NUT:COPPER ALLOY MATERIAL, Ni FINISHED.  
ELECTRICAL CHARACTERISTICS  
HIGH POWER CONTACT CURRENT RATING:10AMPS.  
THE WORKING VOLTAGE:500V.  
HIGH POWER CONTECT RESISTANCE:10 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE:1500 V AC FOR 1 MINUTE.  
INSULATION RESISTANCE:2000 MEGAOHMS MIN.  
TEMPERATURE RATING:-40° ~+85° .

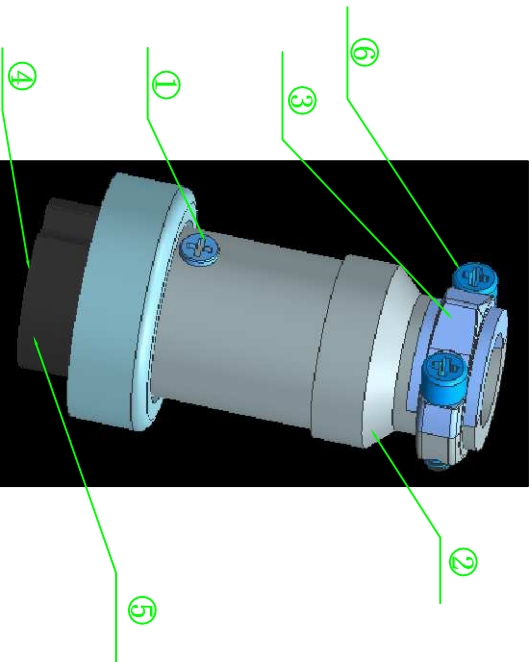

|                                                                                                      |       |        |
|------------------------------------------------------------------------------------------------------|-------|--------|
| ⑥                                                                                                    | 螺丝 2  | 铁/镀镍   |
| ⑤                                                                                                    | 胶 芯   | 电木     |
| ④                                                                                                    | 插 针   | 铜合金/镀银 |
| ③                                                                                                    | 主 体 2 | 锌合金/镀银 |
| ②                                                                                                    | 主 体 1 | 锌合金/镀银 |
| ①                                                                                                    | 螺 丝 1 | 铁/镀镍   |
| 系号                                                                                                   | 名 称   | 材 质    |
| 东莞市迅颢原精密连接器有限公司<br>Dongguan Signalorigin Precision Connector Co.,Ltd                                 |       |        |
| TOLERANCE:<br>X. ±1.0<br>XX ±0.5<br>XXX ±0.3<br>X' ±9° X'Y' ±2°                                      |       |        |
| DRAWN BY : 杨剑玉<br>CHECKED BY: 杨剑玉<br>APPROVED BY: 胡超                                                 |       |        |
| DATE : 2016. 03. 10<br>DATE : 2016. 03. 10<br>DATE : 2016. 03. 11                                    |       |        |
| PART NAME: M16圆形电缆连接器 5P 母座<br>DRAW NO. XHY-05-501-1N04<br>PART NO. 1128-2051AJD-25-501004<br>REMARK |       |        |
| UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                                                |       |        |